

UKOPA Pipeline Fault Database Report

Product Loss Incidents & Faults (1962 – 2023)

UKOPA/RP/25/002 Edition 1

January 2026

REPORT ISSUED BY UKOPA:

This report was prepared by G D Goodfellow and Dr C J Lyons for the UKOPA Fault and Risk Working Group comprising data from: Cadent; National Gas; Northern Gas Networks, SGN; Wales & West Utilities; Gas Networks Ireland; E.ON; Essar Oil (UK) Ltd.; INEOS; Ineos FPS; Sabic; Shell; Wood Group; and supported by the Health and Safety Executive.

Comments, questions and enquiries about this publication should be directed to:

UK Onshore Pipeline Operators' Association
Pipeline Maintenance Centre
Ripley Road
Ambergate
Derbyshire
DE56 2FZ

E-mail: enquiries@ukopa.co.uk

Website: www.UKOPA.co.uk

Disclaimer

This document is protected by copyright and may not be reproduced in whole or in part, by any means without the prior approval in writing of UKOPA. The information contained in this document is provided as guidance only and while every reasonable care has been taken to ensure the accuracy of its contents, UKOPA cannot accept any responsibility for any action taken, or not taken, on the basis of this information. UKOPA shall not be liable to any person for any loss or damage which may arise from the use of any of the information contained in any of its publications. The document must be read in its entirety and is subject to any assumptions and qualifications expressed therein. UKOPA documents may contain detailed technical data which is intended for analysis only by persons possessing requisite expertise in its subject matter.

Copyright ©2026, UKOPA. All rights reserved

Revision and change control history

Planned revision: n/a – a new Product Loss Report is issued each year

Edition	Date	No. of pages	Summary of changes
1	23/01/2026	30	First Issue

CONTENTS

1.	Executive Summary	1
2.	Introduction	2
2.1	Background	2
2.2	Purpose of the Database	2
2.3	Key Advantages	2
3.	Pipeline System Data	3
3.1	Exposure	3
3.2	Transported Products	4
4.	Product Loss Incident Data	5
4.1	Differences between 2022 and 2023 Product Loss Statistics	6
4.2	Incident Ignition	6
4.3	Incident Frequency	7
4.3.1	Trends over the past 5, 20 and 60 Years	7
4.3.2	Confidence Intervals	9
4.4	Incident Frequency by Cause	11
4.5	Girth Weld Defects	14
4.6	External Interference	15
4.6.1	External Interference by Diameter	15
4.6.2	External Interference by Measured Wall Thickness	16
4.6.3	External Interference by Area or Location Classification	17
4.7	External Corrosion	18
4.7.1	External Corrosion by Wall Thickness	18
4.7.2	External Corrosion by Year of Construction	19
4.7.3	External Corrosion by Type of External Coating	20
4.8	Internal Stress Corrosion Cracking	21
4.9	Product Loss Incidents Classified as 'Other'	22
4.10	Detection of Product Loss Incidents	23
5.	Fault Data	24
5.1	Part Wall Defect Data	25
5.2	Statistical Distributions of Defect Dimensions	25
6.	References	27

1. EXECUTIVE SUMMARY

This report presents collaborative pipeline and product loss incident data from onshore Major Accident Hazard Pipelines (MAHPs) operated by National Gas, Cadent, Northern Gas Networks, SGN, Wales & West Utilities, Gas Networks Ireland, E.ON, Essar Oil (UK) Ltd., INEOS, Ineos FPS, Sabic, Shell and Wood Group, covering operating experience up to the end of 2023.

MAHPs are defined by the UK statutory legislation, The Pipelines Safety Regulations 1996 (PSR96), for natural gas, the classification is above 8 bar absolute.

The data presented here covers reported incidents where there was an unintentional loss of product from a pipeline within the public domain, and not within a compound or other operational area.

The overall failure frequency for the period from 1962 to 2023 is 0.190 incidents per 1000 km years, which is slightly lower than the previous report covering the period from 1962 to 2022 (0.194 incidents per 1000 km years). The overall trend continues to show a gradual reduction in failure frequency.

The failure frequency over the last 20 years is 0.076 incidents per 1000 km years.

For the last 5 years the failure frequency is 0.043 incidents per 1000 km years, whilst in the previous report this figure was 0.042 incidents per 1000 km years (covering the 5 year period up to the end of 2022).

This report also includes data for part-wall damage and defects, known as fault data; and the statistical distributions (derived from the 1962 to 2016 data) for use in estimating pipeline failure probabilities due to external interference events.

2. INTRODUCTION

2.1 Background

One of the key objectives of UKOPA is to develop a comprehensive view on risk assessment and risk criteria as they affect Land Use Planning (LUP) aspects adjacent to, and operational As Low As Reasonably Practicable (ALARP) assessments on, Major Accident Hazard Pipelines (MAHPs)¹. The main multiplier in pipeline risk assessments is the per unit length failure rate, which directly influences the extent of the risk zones adjacent to the pipelines.

Historically, regulators and consultants who carried out risk assessments for UK pipelines relied on US and European data to provide the basis for deriving failure rates, due to the shortage of verified published data relating to UK pipelines. To counteract this lack of widely available UK specific data, UKOPA collects product loss incident and fault (i.e. part-wall defect) data in an extension to the original British Gas database. UKOPA published the first report in November 2000, presenting the first set of data for pipeline incidents resulting in the unintentional release of product from 1962 up to the end of 1998.

2.2 Purpose of the UKOPA Database

The purpose of the database is to:

- Record leak and fault data for all UK MAHPs;
- Estimate leak and rupture frequencies for UK pipelines, based directly on historical failure rate data for UK pipelines;
- Provide the means to estimate failure rates for UK pipelines for quantitative risk assessment purposes based on analysis of damage data for UK pipelines; and,
- Provide the means to test design intentions and determine the effect of engineering changes (e.g. wall thickness, depth of cover, diameter, protection measures, inspection methods and frequencies, design factor etc.) on failure rates.

2.3 Key Advantages of the Database

The database is designed to reflect the ways in which the UKOPA operators design, build, operate, inspect and maintain their pipeline systems. Although the pipeline population is extensive and the data covers over 60 years of operation, there are pipeline groups (e.g. large diameter, recently constructed pipelines) on which no faults or failures have occurred, or for which failure data is not statistically significant; however, it is unreasonable to assume that the failure frequency for these pipelines is zero.

The UKOPA database contains extensive data on pipeline failures and on part-wall damage known as fault data, allowing prediction of failure frequencies for pipelines for which insufficient failure data exist. Using Structural Reliability Analysis and fracture mechanics techniques it is possible to determine the range of defect dimensions that will cause a specific pipeline to fail; analysis of the statistical distributions of actual defect dimensions from the part-wall defect data allows the probability of a critical defect to be determined and failure frequencies for external interference failures to be calculated.

This approach has been used extensively and successfully by contributing companies in pipeline uprating projects and quantitative risk assessments (QRAs).

¹ Defined by UK statutory legislation – The Pipelines Safety Regulations 1996 (PSR96) [8]. For pipelines containing natural gas this is those operating at pressures above 8 bar absolute (i.e. > 7 barg)

3. PIPELINE SYSTEM DATA

3.1 Exposure

The total length of MAHPs in operation at the end of 2023 reported by all participating companies (National Gas, Cadent, Northern Gas Networks, SGN, Wales & West Utilities, Gas Networks Ireland, E.ON, Essar Oil (UK) Ltd., INEOS, Ineos FPS, Sabic, Shell, Uniper and Wood Group) was 23,165 km. The total length of MAHPs in operation to the end of 2022 was 23,574 km.

The total exposure in the period 1952 to the end of 2023 was 1,092,477 km years. The development of this exposure is illustrated in Figure 3.1.

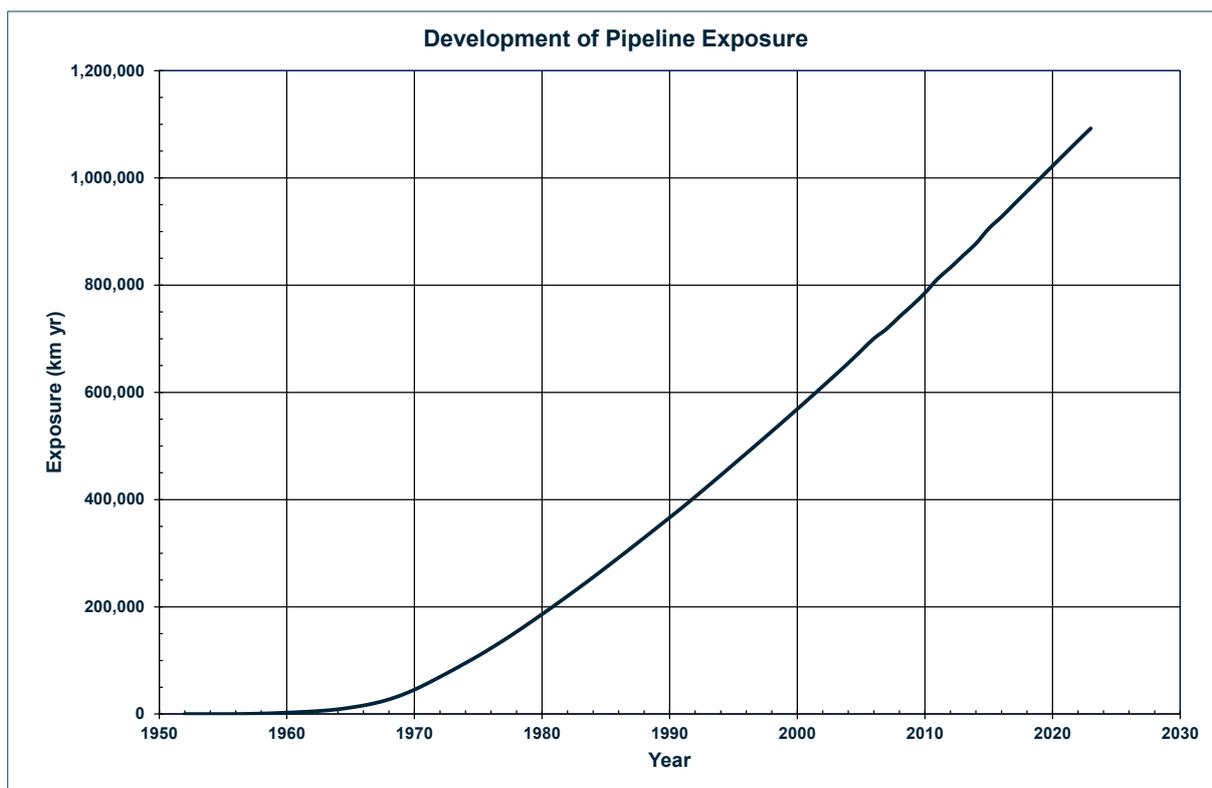


Figure 3.1: MAHP Operating Exposure from 1952 to 2023

Note 1: Pipeline exposure before first recorded incident in 1962 = 3,740 km.yr (included in exposure and incident frequency calculations).

Note 2: Short above ground sections of cross-country pipelines are included in totals.

3.2 Transported Products

The reported lengths (in km) of pipeline in operation at the end of 2023, by transported product, are shown in Table 3.1.

Product	Length (km)	%age of Total
Natural Gas (Dry)	21,408.22	92.4
Ethylene	1,140.94	4.9
Natural Gas Liquids	251.00	1.1
Crude Oil (Spiked)	212.60	0.9
Ethane	38.10	0.2
Propylene	37.00	0.2
Condensate	24.00	0.1
Propane	19.50	0.1
Butane	19.50	0.1
Hydrogen	14.14	0.1
TOTAL	23,165	100.0

Table 3.1: 2023 Pipeline Operating Lengths

4. PRODUCT LOSS INCIDENT DATA

A product loss incident is defined in the context of this report as:

- An unintentional loss of product from the pipeline;
- Within the public domain and outside the fences of installations; and,
- Excluding associated equipment (e.g. valves, compressors).

A total of 208 product loss incidents were recorded over the period between 1962 and 2023 compared with 207 product loss incidents documented in the report covering the period to 2022 [1]. No product loss incidents were recorded prior to 1962. An annual breakdown of incidents is illustrated in Figure 4.1.

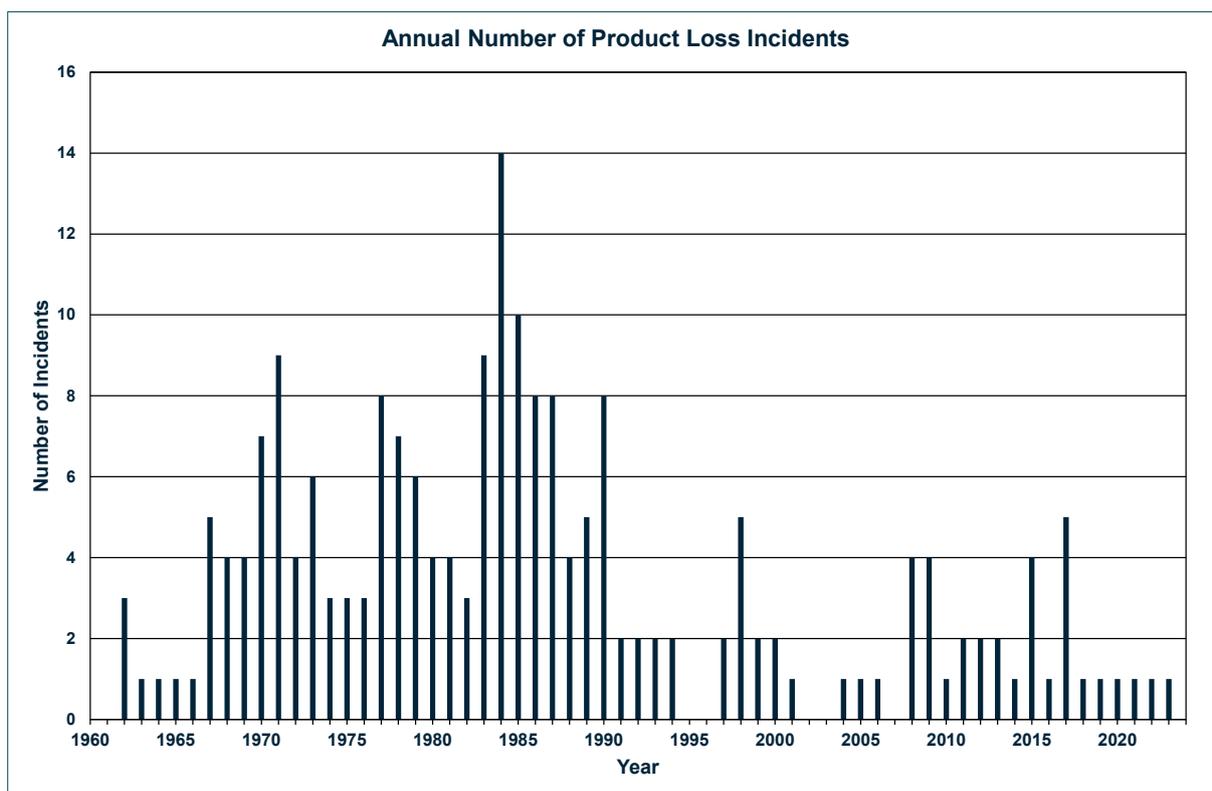


Figure 4.1: Product Loss Incidents per year since 1962

4.1 Differences between 2022 and 2023 Product Loss Statistics

One product loss incident was recorded in 2023: a pinhole leak due to external corrosion. In 2022, one product loss incident was recorded from a pinhole leak in the girth weld at a tee. The cumulative number of incidents between 1962 and 2023 is shown in Figure 4.2.

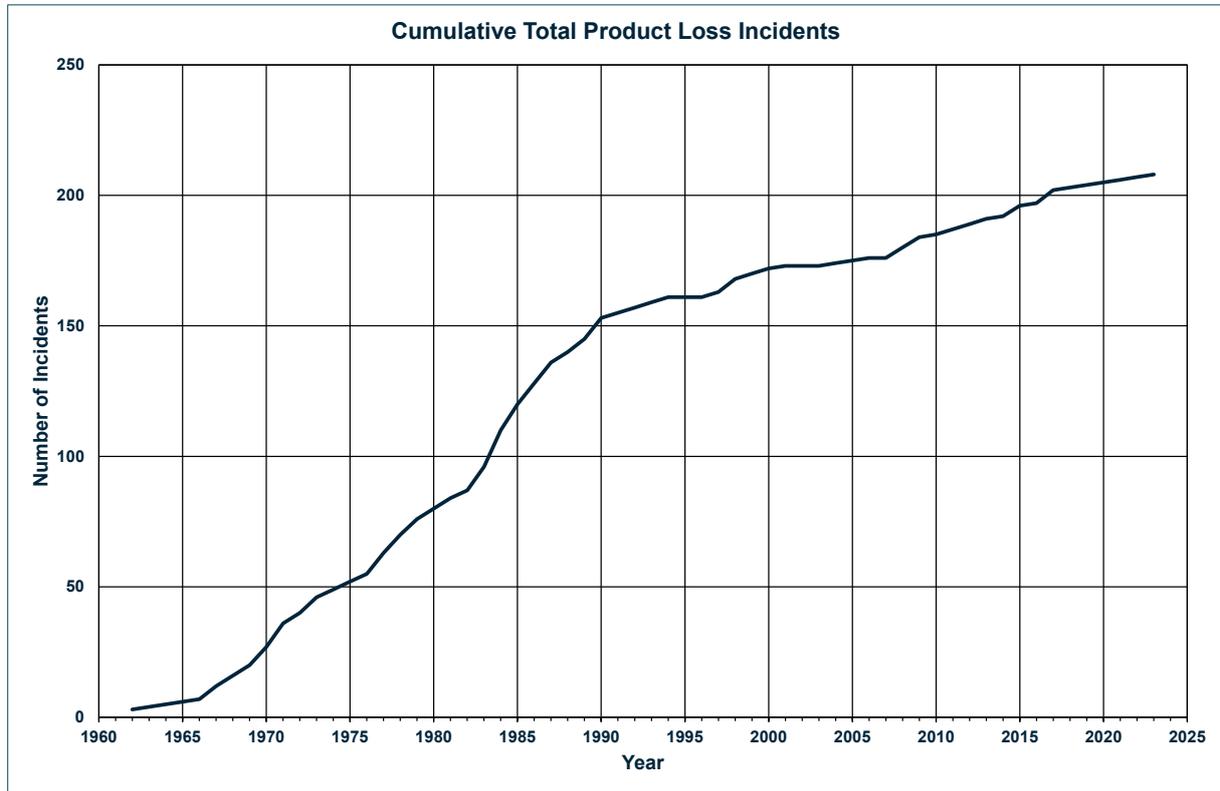


Figure 4.2: Cumulative Product Loss Incidents since 1962

4.2 Incident Ignition

Only 9 out of 208 (4.33%) product loss incidents have resulted in ignition, see Table 4.1.

Affected Component	Cause of Fault	Hole Diameter Range	Year
Pipe	Pipe Defect	0 - 6 mm	1963
Bend	Internal Corrosion	0 - 6 mm	1969
Pipe	Girth Weld Defect	6 - 20 mm	1970
Bend	Pipe Defect	6 - 20 mm	1971
Pipe	Unknown	6 - 20 mm	1972
Pipe	Ground Movement	Full Bore	1984
Pipe	Other	40 - 110 mm	1991
Pipe	Seam Weld Defect	0 - 6 mm	1994
Pipe	Lightning Strike	0 - 6 mm	1998

Table 4.1: Ignited Product Loss Incidents

4.3 Incident Frequency

4.3.1 Trends over the past 5, 20 and 60 Years

The incident frequency over consecutive 5-year periods up to the end of 2023 is shown in Table 4.2.

Period	Number of Incidents	Total Exposure (km yr)	Frequency (Incidents per 1000 km yr)
<=1958	0	942.50	
1959 – 1963	4	5,647.32	0.708
1964 – 1968	12	20,741.72	0.579
1969 – 1973	30	54,654.24	0.549
1974 – 1978	24	71,385.11	0.336
1979 – 1983	26	84,055.16	0.309
1984 – 1988	44	91,352.98	0.482
1989 – 1993	19	96,423.67	0.197
1994 – 1998	9	101,971.47	0.088
1999 – 2003	5	105,807.61	0.047
2004 – 2008	7	107,995.22	0.065
2009 – 2013	11	114,480.67	0.096
2014 – 2018	12	119,465.58	0.100
2019 – 2023	5	117,553.54	0.043
TOTAL	208	1,092,477	0.190

Table 4.2: 5-year Incident Frequency

The overall incident frequency by hole size over the period 1962 – 2023 is shown in Table 4.3.

Equivalent Hole Size (θ) ²	Number of Incidents	Frequency (per 1000 km yr)
$\theta \geq$ Full Bore ³	7	0.006
$75 \leq \theta < 150$ mm	6	0.005
$25 \leq \theta < 75$ mm	20	0.018
$6 \leq \theta < 25$ mm	38	0.035
$0 \leq \theta < 6$ mm	137	0.125
Unknown	0	0.000
TOTAL	208	0.190

Table 4.3: Overall Incident Frequency by Hole Size

² Equivalent hole size quoted in this report is the circular hole diameter in mm with an area equivalent to the observed (usually non-circular) hole.

³ Full Bore \equiv diameter of the pipeline

The total exposure for the last 20 years (2004 – 2023) is 459,495 km years and the resulting incident frequency is shown in Table 4.4.

Equivalent Hole Size (θ)	Number of Incidents	Frequency (per 1000 km yr)
$\theta \geq$ Full Bore	0	0.000
$75 \leq \theta < 150$ mm	1	0.002
$25 \leq \theta < 75$ mm	4	0.009
$6 \leq \theta < 25$ mm	3	0.007
$0 \leq \theta < 6$ mm	27	0.059
Unknown	0	0.000
TOTAL	35	0.076

Table 4.4: 20-year Incident Frequency by Hole Size

The failure frequency over the last 20 years (2004 – 2023) is 0.076 incidents per 1000 km yr and for the last 5 years (2019 – 2023) is 0.043 incidents per 1000 km yr.

These compare with the overall failure frequency during the period 1962 – 2023 of 0.190 incidents per 1000 km yr. An overview of the development of this failure frequency is shown in Figure 4.3 below. In order to see the results over recent periods, the moving average for each year is calculated with reference to the incidents from the previous 5 years (2019 – 2023, 2018 – 2022, 2017 – 2021 etc.).

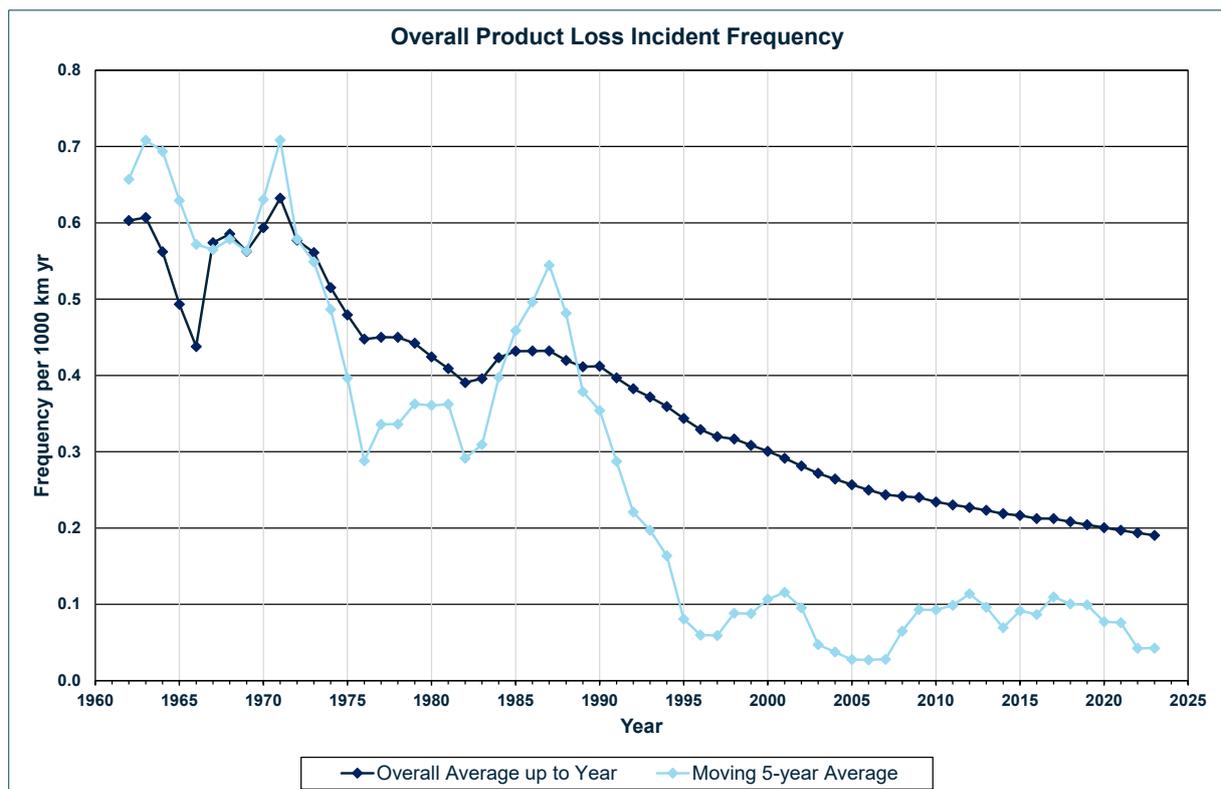


Figure 4.3: Development of overall and 5-year Incident Frequency

4.3.2 Confidence Intervals

Confidence intervals take uncertainty into account. For a specified confidence level (e.g. 95%), the greater the exposure, the narrower the confidence interval. In other words, the uncertainty decreases as more operating experience is gained.

Pipeline failures are discrete events, that tend to occur randomly and are independent of each other. To calculate the confidence intervals, it is therefore assumed that the failure data will follow a Poisson distribution. The 95% confidence intervals for the overall average failure frequency are shown in Figure 4.4 and for the 5-year average in Figure 4.5.

Figure 4.4 shows that the overall frequency for the whole period is 0.190 per 1000 km yr +/- 0.026 and Figure 4.5 shows that the 5-year average failure frequency for 2019 – 2023 is 0.043 per 1000 km yr +/- 0.038.

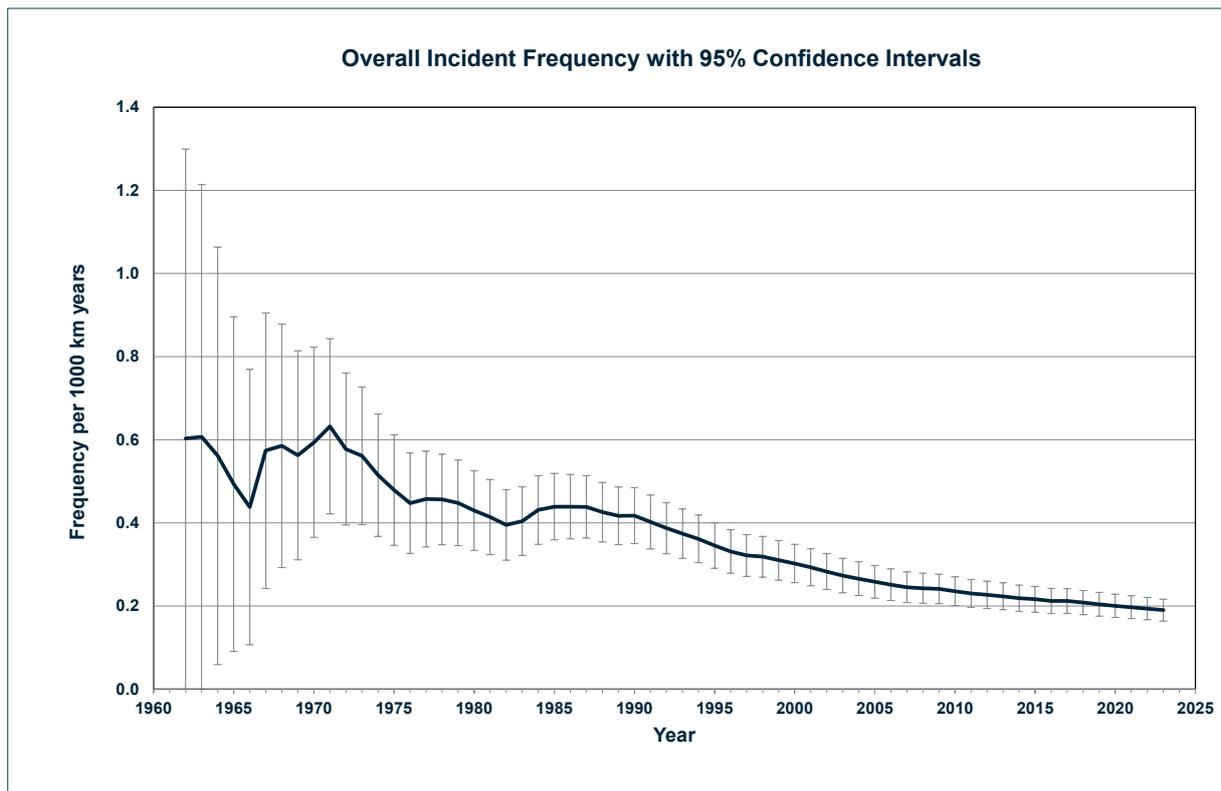


Figure 4.4: Overall Incident Frequency with 95% Confidence Intervals

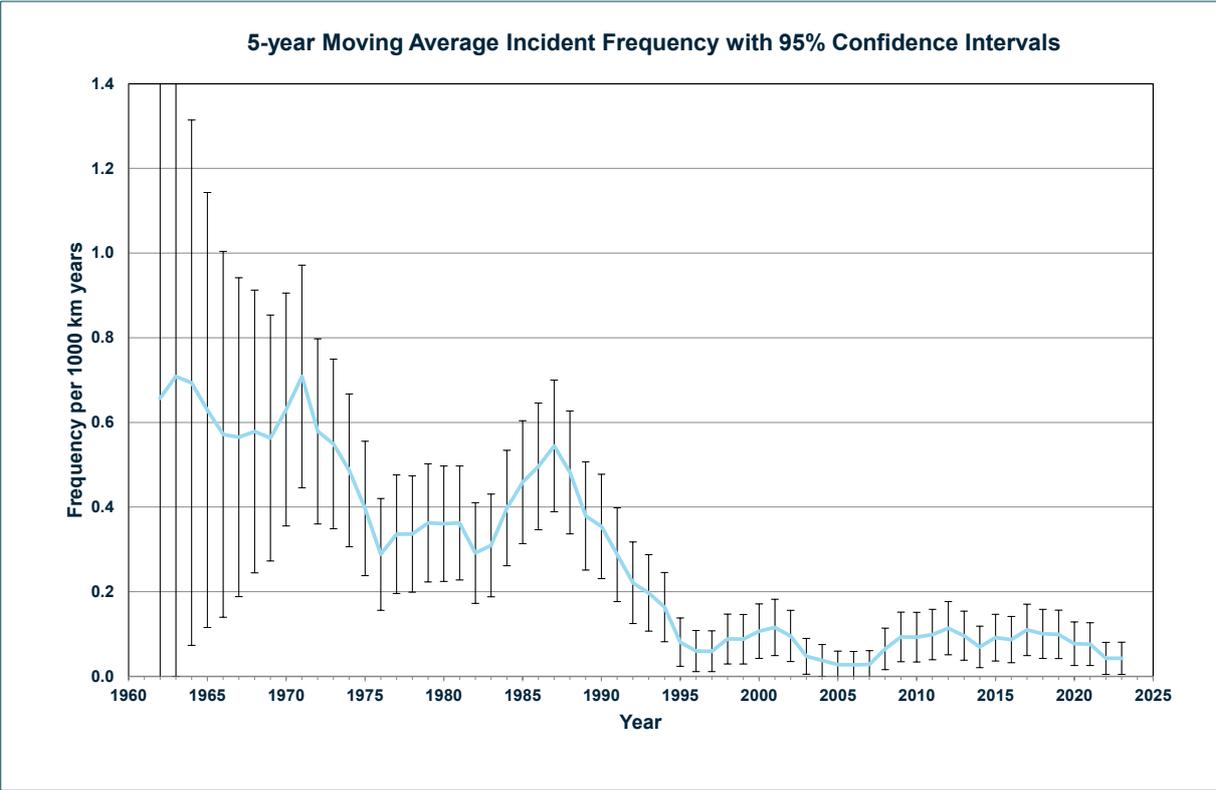


Figure 4.5: 5-year Incident Frequency with 95% Confidence Intervals

4.4 Incident Frequency by Cause

The development of product loss incident frequency by cause is shown in Figure 4.6, and the total number of incidents due to each cause is listed in Table 4.5.

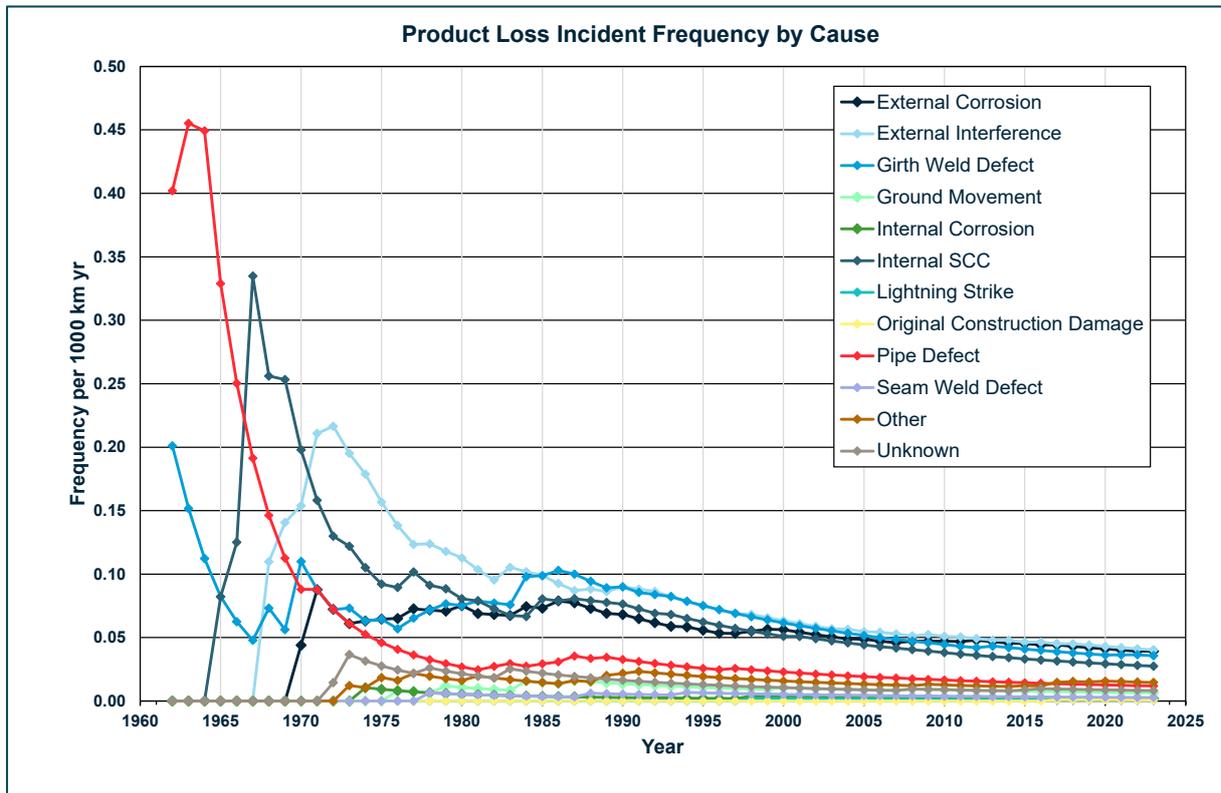


Figure 4.6: Product Loss Incident Frequency by Cause

Product Loss Cause	No. of Incidents	%age of Total
External Corrosion	43	20.7
External Interference	44	21.2
Girth Weld Defect	39	18.8
Ground Movement	7	3.4
Internal Corrosion	2	1.0
Internal SCC	30	14.4
Lightning Strike	1	0.5
Original Construction Damage	1	0.5
Pipe Defect	13	6.3
Seam Weld Defect	3	1.4
Other ⁴	16	7.7
Unknown	9	4.3
TOTAL	208	100

Table 4.5: Product Loss Incidents by Cause

Figure 4.7 shows the product loss incident frequency by cause over the period 1962 – 2023 compared with the frequency over the last 5 years (2019 – 2023).

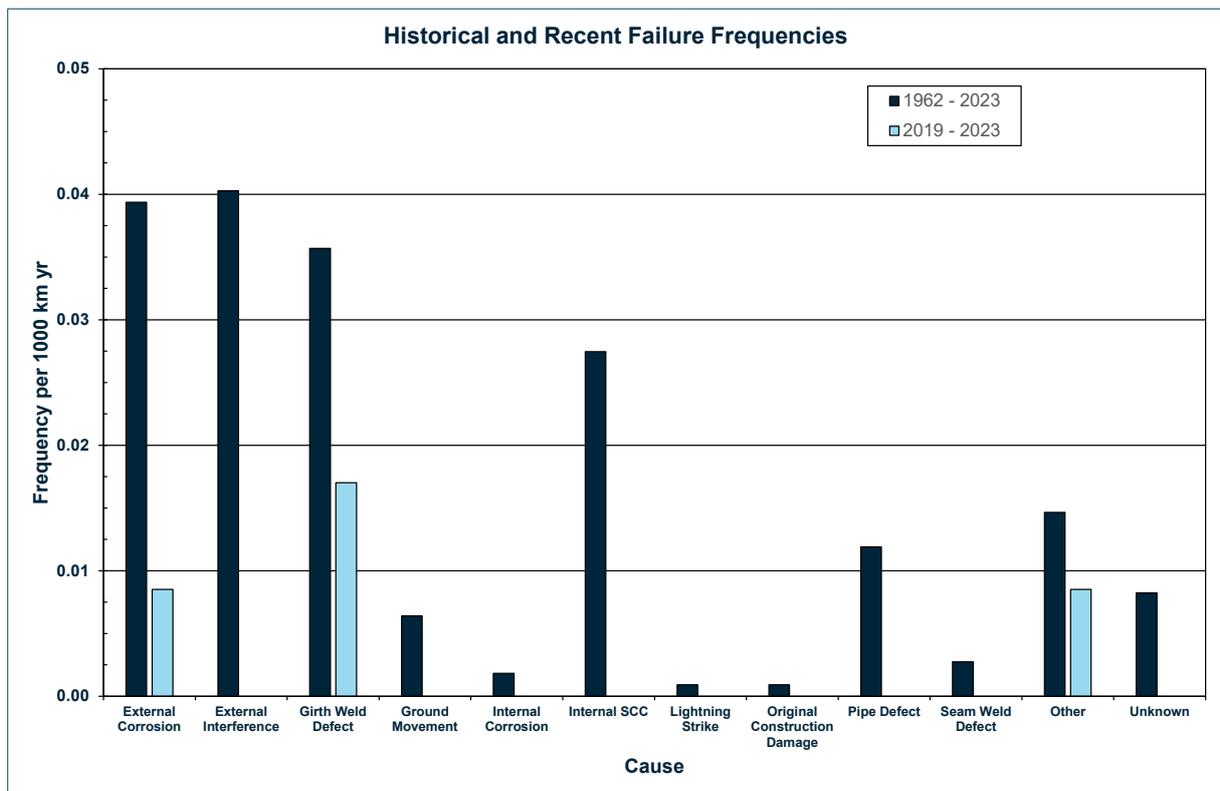


Figure 4.7: Overall and 5-year Product Loss Incident Frequency by Cause

⁴ See Section 4.9 for further details.

An overview of the product loss incident frequency by cause and size of leak in the period 1962 to 2023 is shown in Figure 4.8.

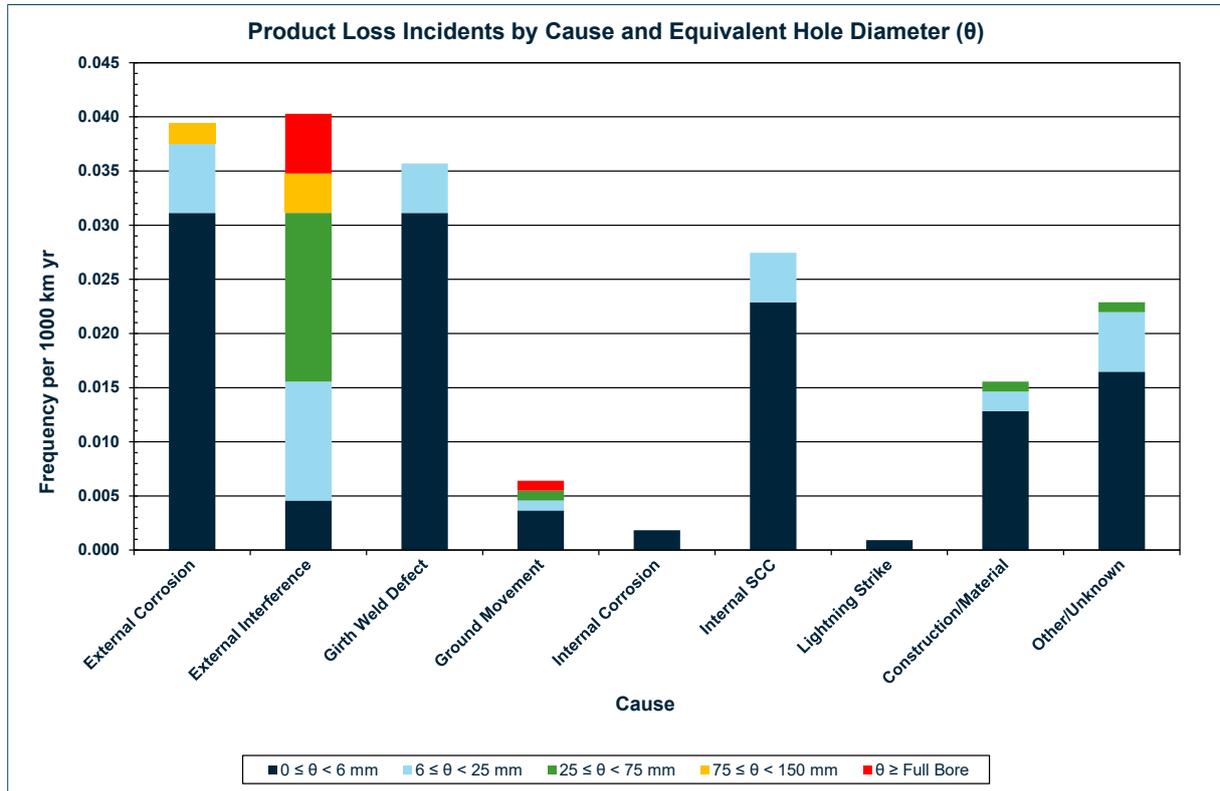


Figure 4.8: Product Loss Incident Frequency by Cause and Size of Leak

Note 1: Construction/Material = Seam Weld Defect + Pipe Defect + Pipe Mill Defect + Original Construction Damage

Note 2: Full Bore ≡ diameter of pipeline

4.5 Girth Weld Defects

Girth weld defects are the third highest cause of product loss in the database. Figure 4.9 shows that 39 leaks due to girth weld defects were recorded in pipelines constructed before 1985, 36 of which were in pipelines constructed before 1972. All the leaks had an equivalent hole diameter less than 20 mm with the majority less than 6 mm.

The reduction in the number of girth weld defects in pipelines constructed after 1972 is associated with the improvements in field weld inspection and quality control procedures, and the increasing capability of in-line inspection tools to detect girth weld anomalies.

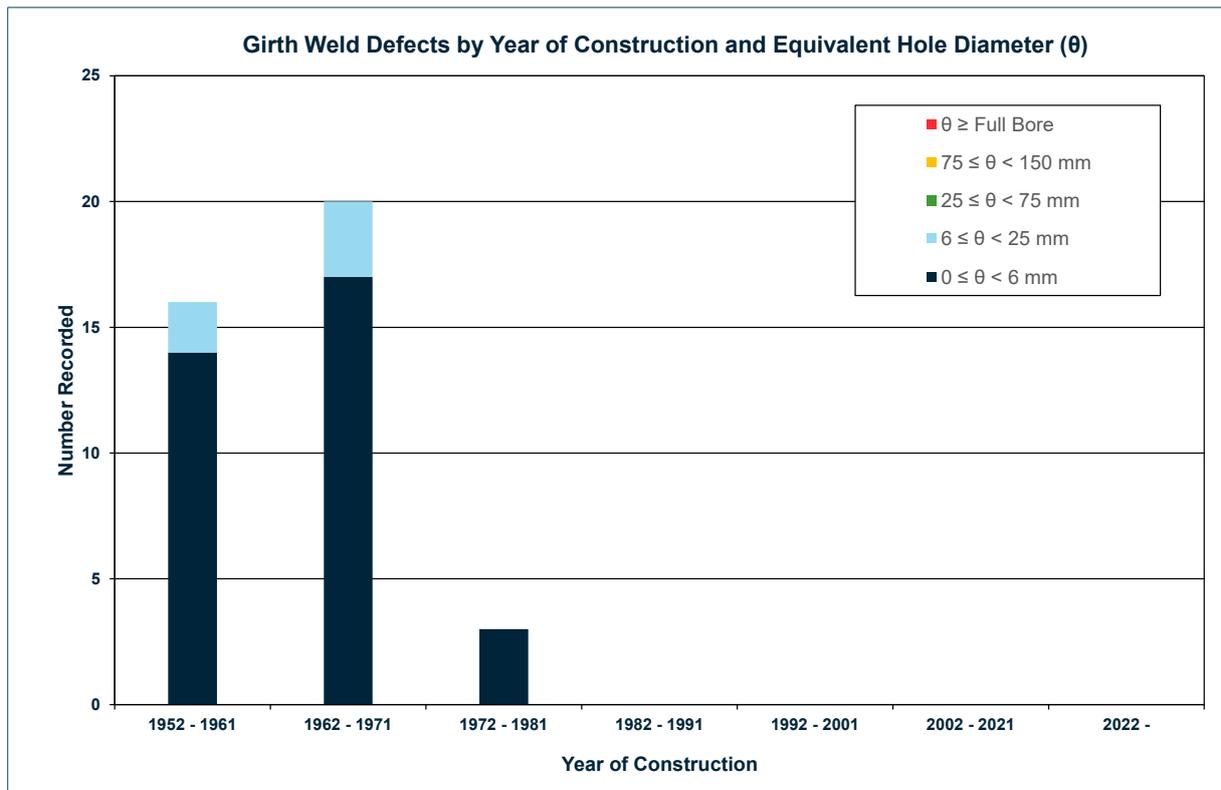


Figure 4.9: Girth Weld Defects

4.6 External Interference

External interference is the most common cause of product loss incidents with 44 recorded incidents attributable to this cause.

4.6.1 External Interference by Diameter

Figure 4.10 shows the product loss incident frequencies associated with external interference by diameter class and by hole size and the total frequencies by diameter class are shown in Table 4.6.

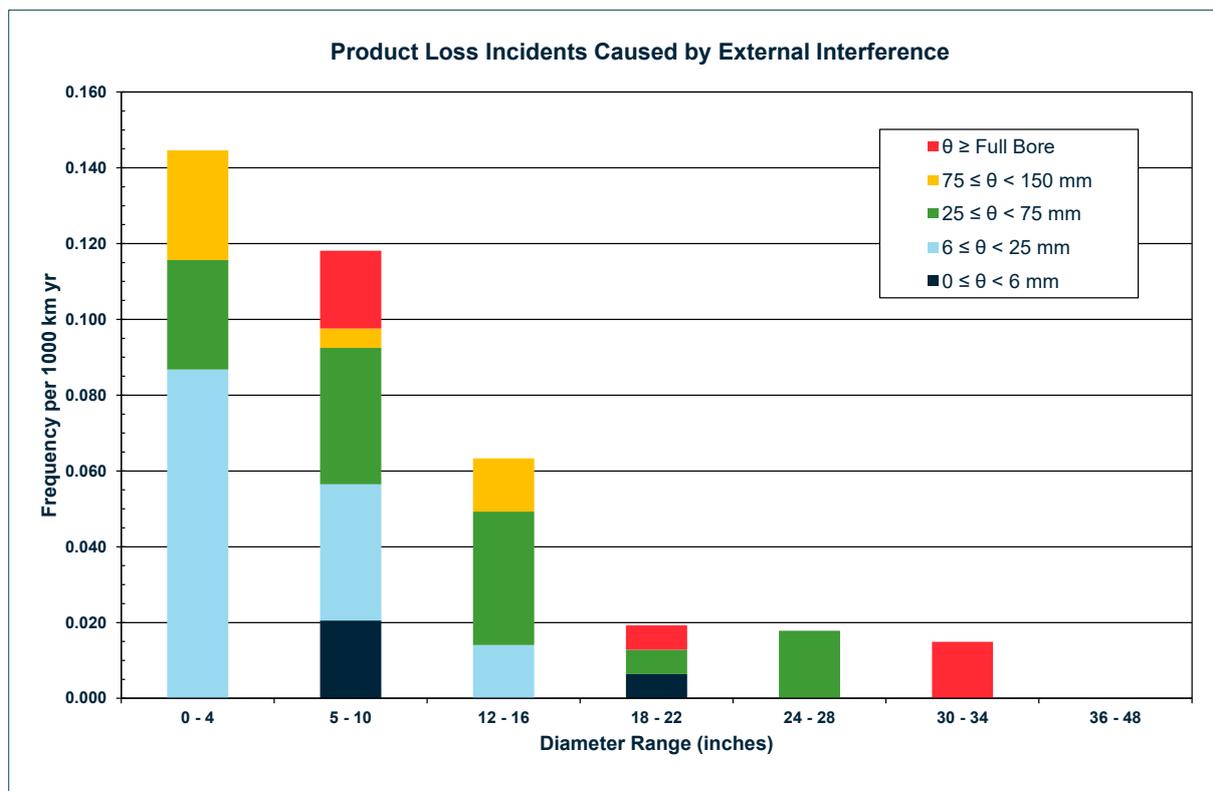


Figure 4.10: External Interference Product Loss Frequency by Diameter and Equivalent Hole Size (θ)

Diameter Class (inches)	Exposure (km yr)	No. of External Interference Incidents	Frequency (Incidents per 1000 km yr)
0 – 4	34,576	5	0.145
5 – 10	194,697	23	0.118
12 – 16	142,100	9	0.063
18 – 22	155,916	3	0.019
24 – 28	168,006	3	0.018
30 – 34	67,033	1	0.015
36 – 48	330,149	0	0.000
TOTAL	1,092,477	44	0.040

Table 4.6: External Interference Incidents by Diameter Class

4.6.2 External Interference by Measured Wall Thickness

The relationship between product loss incidents caused by external interference and wall thickness is shown in Figure 4.11 and Table 4.7 below.

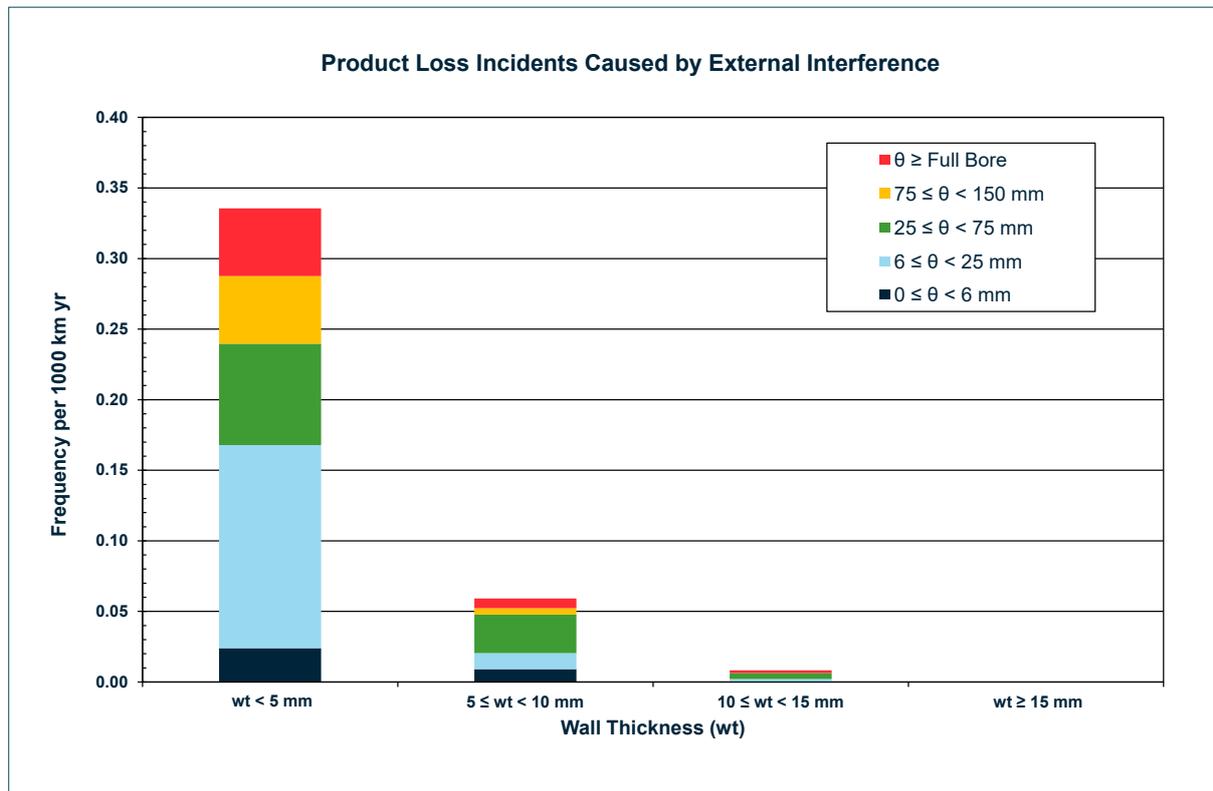


Figure 4.11: External Interference Product Loss Frequency by Wall Thickness (wt) and Equivalent Hole Size (θ)

Note 1: The largest wall thickness for a product loss incident caused by external interference to date is 12.7 mm

Wall Thickness (mm)	Exposure (km yr)	No. of External Interference Incidents	Frequency (Incidents per 1000 km yr)
wt < 5	41,718	14	0.336
5 ≤ wt < 10	439,539	26	0.059
10 ≤ wt < 15	481,128	4	0.008
wt ≥ 15	116,154	0	0.000
Unknown	13,938	0	0.000
TOTAL	1,092,477	44	0.040

Table 4.7: External Interference Incidents by Wall Thickness (wt)

4.6.3 External Interference by Area or Location Classification

The relationship between product loss incidents caused by external interference and location or area class is shown in Figure 4.12 and Table 4.8 below.

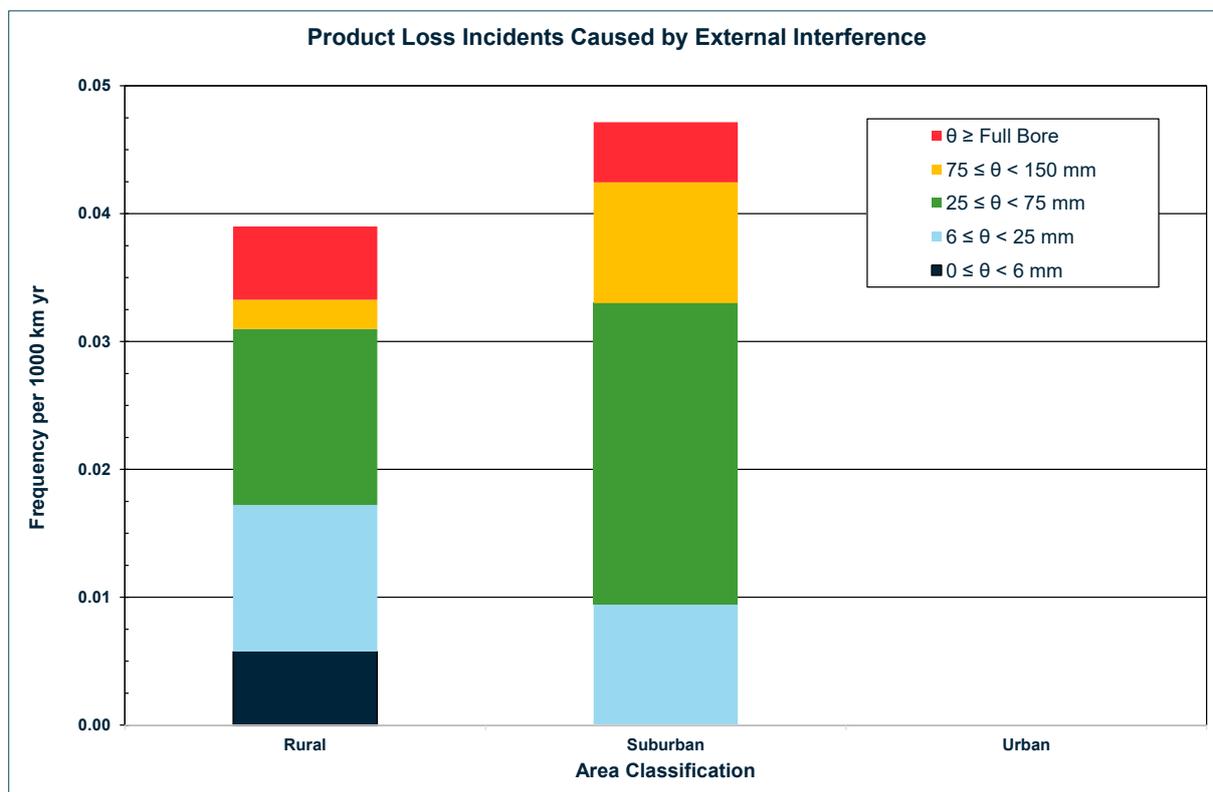


Figure 4.12: External Interference Product Loss Frequency by Area (or Location) Class and Equivalent Hole Size (θ)

Area Class	Exposure (km yr)	No. of External Interference Incidents	Frequency (Incidents per 1000 km yr)
Rural	871,637	34	0.039
Suburban	212,031	10	0.047
Urban	7,739	0	0.000
Other/Unknown	1,069	0	0.000
TOTAL	1,092,477	44	0.040

Table 4.8: External Interference by Area Class

*Note 1: Rural = population density < 2.5 persons per hectare
 Suburban = population density > 2.5 persons per hectare and which may be extensively developed with residential properties, and includes data classified by operators as semi-rural
 Urban = central areas of towns or cities⁵ with a high population density*

⁵ MAHPs transporting natural gas are not allowed to operate in Urban (Type T) areas.

4.7 External Corrosion

External corrosion is the second highest cause of product loss incidents, just behind external interference, with 43 recorded failures.

4.7.1 External Corrosion by Wall Thickness

Figure 4.13 and Table 4.9 show the relationship product loss incident frequencies due to external corrosion and wall thickness.

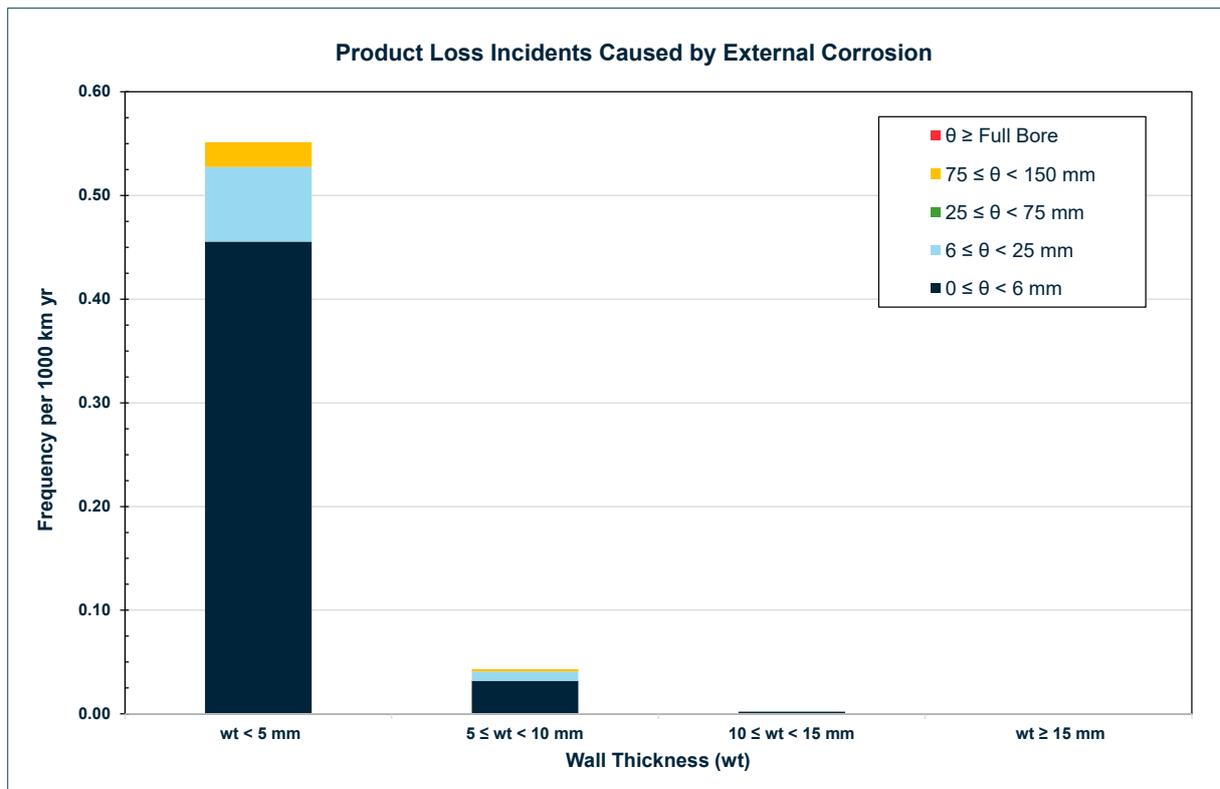


Figure 4.13: External Corrosion Product Loss Frequency by Wall Thickness and Equivalent Hole Size (θ)

Note 1: The largest wall thickness for a product loss incident caused by external corrosion to date is 10 mm

Wall Thickness (mm)	Exposure (km yr)	No. of External Corrosion Incidents	Frequency (Incidents per 1000 km yr)
wt < 5	41,718	23	0.551
5 ≤ wt < 10	439,539	19	0.043
10 ≤ wt < 15	481,128	1	0.002
wt ≥ 15	116,154	0	0.000
Unknown	13,938	0	0.000
TOTAL	1,092,477	43	0.039

Table 4.9: External Corrosion Incidents by Wall Thickness (wt)

4.7.2 External Corrosion by Year of Construction

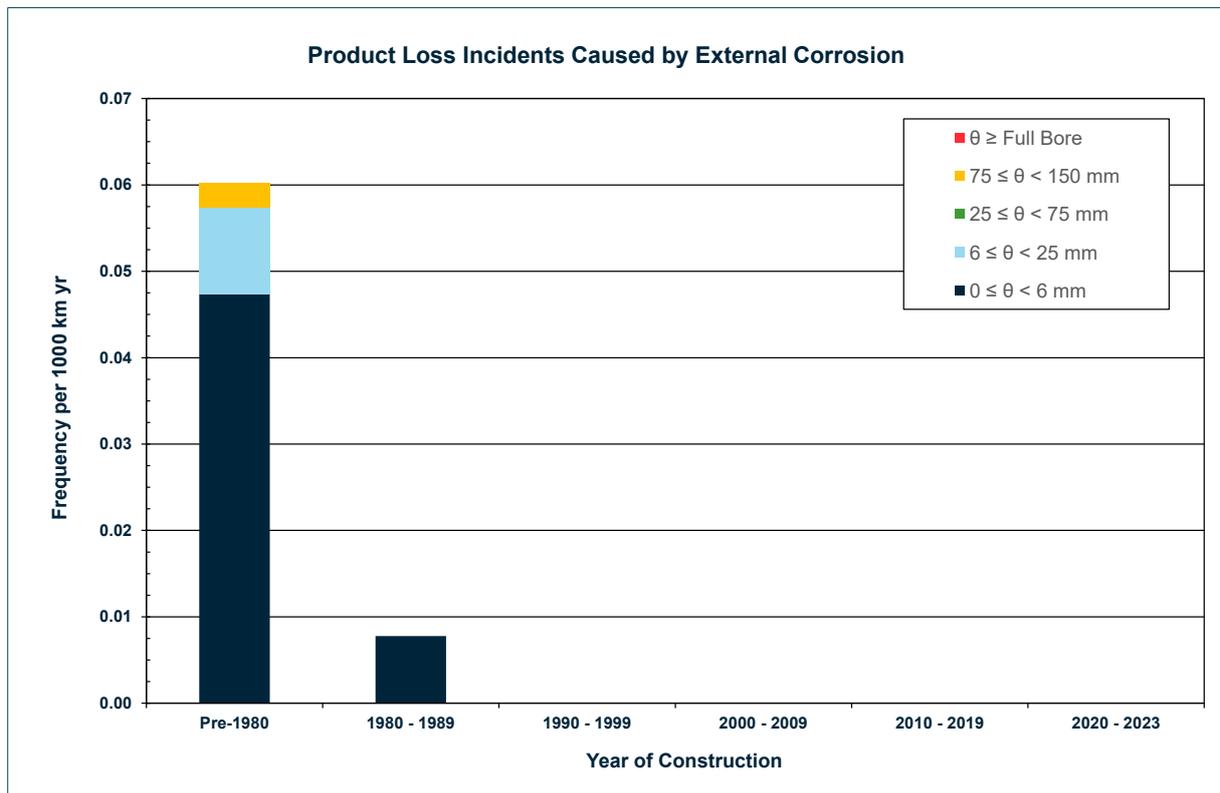


Figure 4.14: External Corrosion Product Loss Frequency by Year of Construction and Equivalent Hole Size (θ)

Construction Year	Exposure (km yr)	No. of External Corrosion Incidents	Frequency (Incidents per 1000 km yr)
Pre-1980	696,768	42	0.060
1980 – 1989	128,552	1	0.008
1990 – 1999	102,687	0	0.000
2000 – 2009	132,791	0	0.000
2010 – 2019	14,694	0	0.000
2020 – 2023	445	0	0.000
Unknown	16,540	0	0.000
TOTAL	1,092,477	43	0.039

Table 4.10: External Corrosion Incidents by Year of Construction

The reduction in the number of incidents due to external corrosion for pipelines constructed after 1980 is partly associated with the introduction of in-line inspection, which together with appropriate defect acceptance criteria and improved cathodic protection monitoring systems, means that metal loss defects are detected and repaired before developing to through-wall product loss incidents.

4.7.3 External Corrosion by Type of External Coating

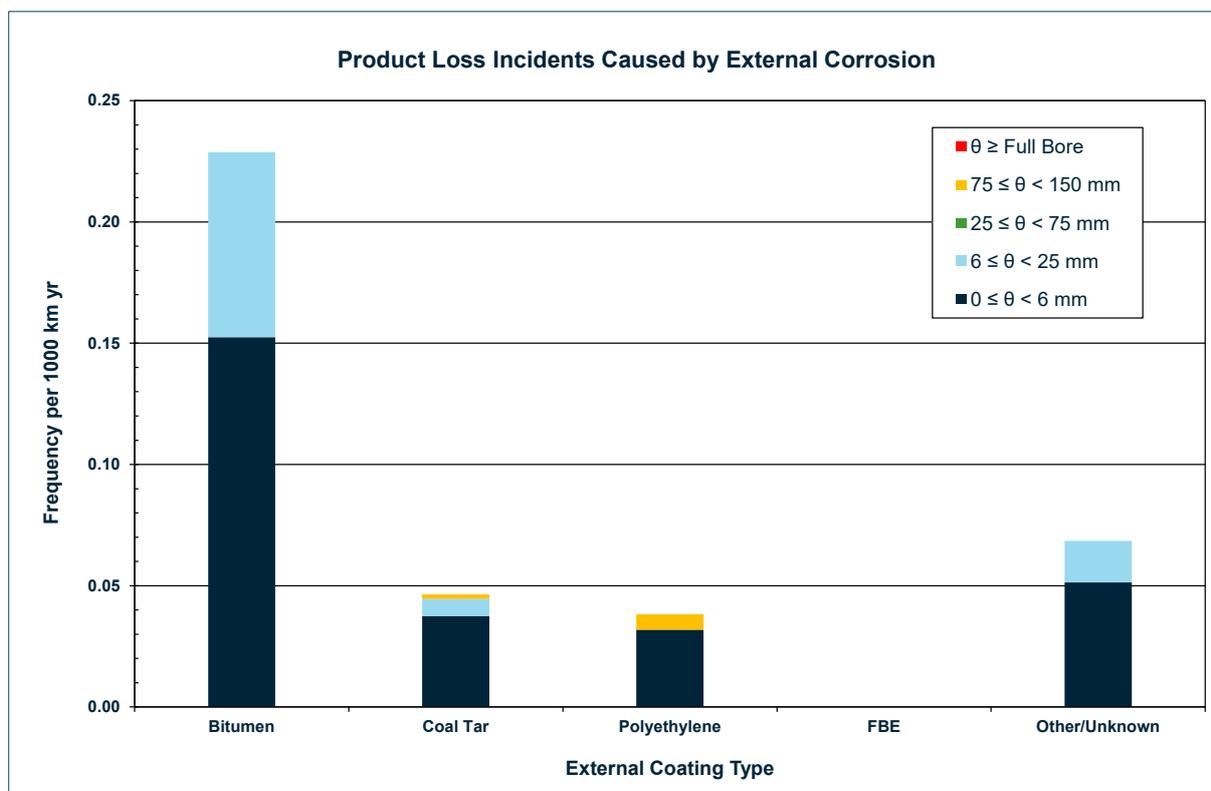


Figure 4.15: External Corrosion Product Loss Frequency by External Coating and Equivalent Hole Size (θ)

External Coating	Exposure (km yr)	No. of External Corrosion Incidents	Frequency (Incidents per 1000 km yr)
Bitumen	13,117	3	0.229
Coal Tar	560,834	26	0.046
Polyethylene (PE)	157,006	6	0.038
Fusion Bonded Epoxy (FBE)	244,669	0	0.000
Other/Unknown	116,851	8	0.068
TOTAL	1,092,477	43	0.039

Table 4.11: External Corrosion Incidents by External Coating

4.8 Internal Stress Corrosion Cracking

30 product loss incidents were caused by internal stress corrosion cracking (SCC) in pipelines which had seen wet towns gas service prior to the introduction of natural gas in the UK. All thirty failures were in pipelines constructed before 1977, when the conversion to natural gas service was completed, and 93% (28 out of 30) were in pipelines constructed before 1972.

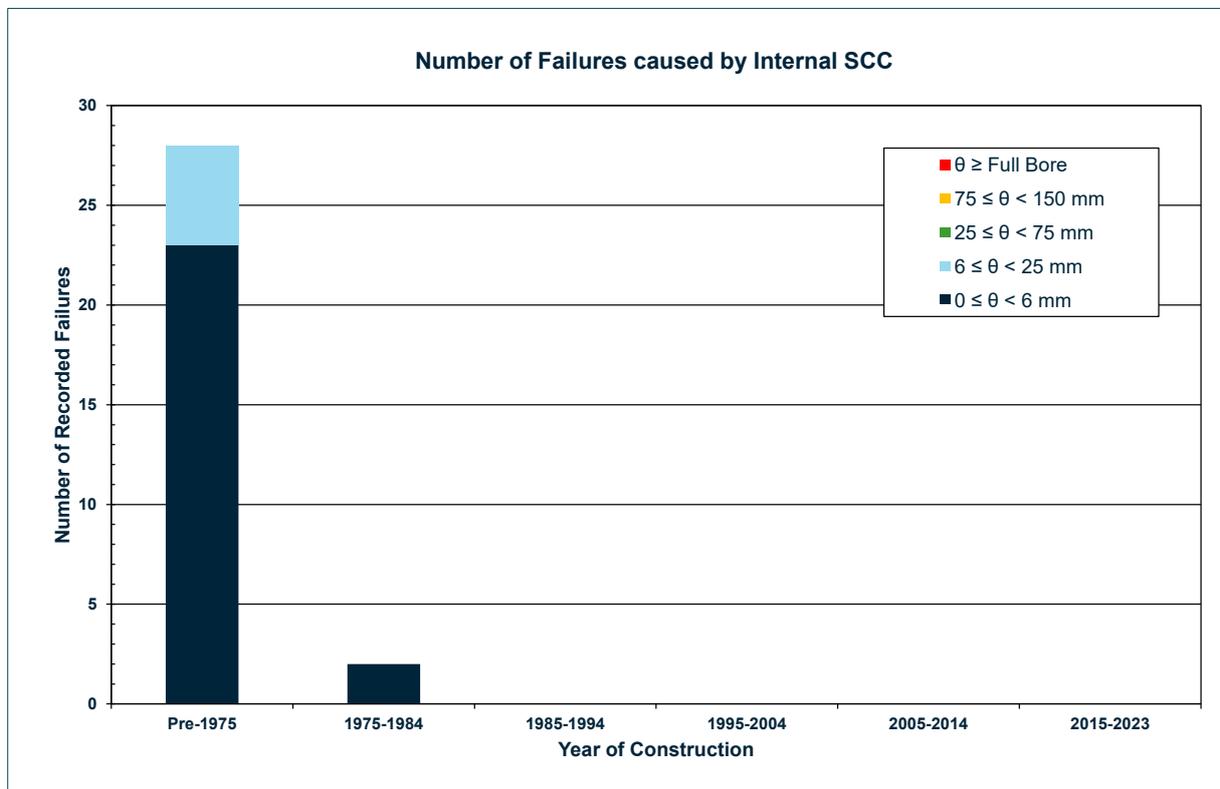


Figure 4.16: Internal SCC Product Loss Incidents by Year of Construction and Equivalent Hole Diameter (θ)

4.9 Product Loss Incidents Classified as ‘Other’

Pipeline failures due to causes other than those defined as:

- External Interference
- Corrosion & Stress Corrosion Cracking (SCC)
- Material and Construction related
- Ground movement (or other environmental load)

are generally classified as “Other” with more detail provided in the comments field,

The UKOPA product loss data contains 16 incidents recorded under this category with a range of causes:

Other Cause	No. of Incidents
Pipe / Fitting Weld	4
Socket & Spigot Weld	4
Leaking Clamps	3
Electric Cable Arc Strike	1
Stopples Tee Flange	2
Syphon Flange	1
Threaded Joint	1
TOTAL	16

Table 4.12: Product Loss Incidents Classified as Other

It should be noted that the majority of product loss incidents in recent years have been associated with attachments to the pipeline, rather than failures of the pipe itself.

4.10 Detection of Product Loss Incidents

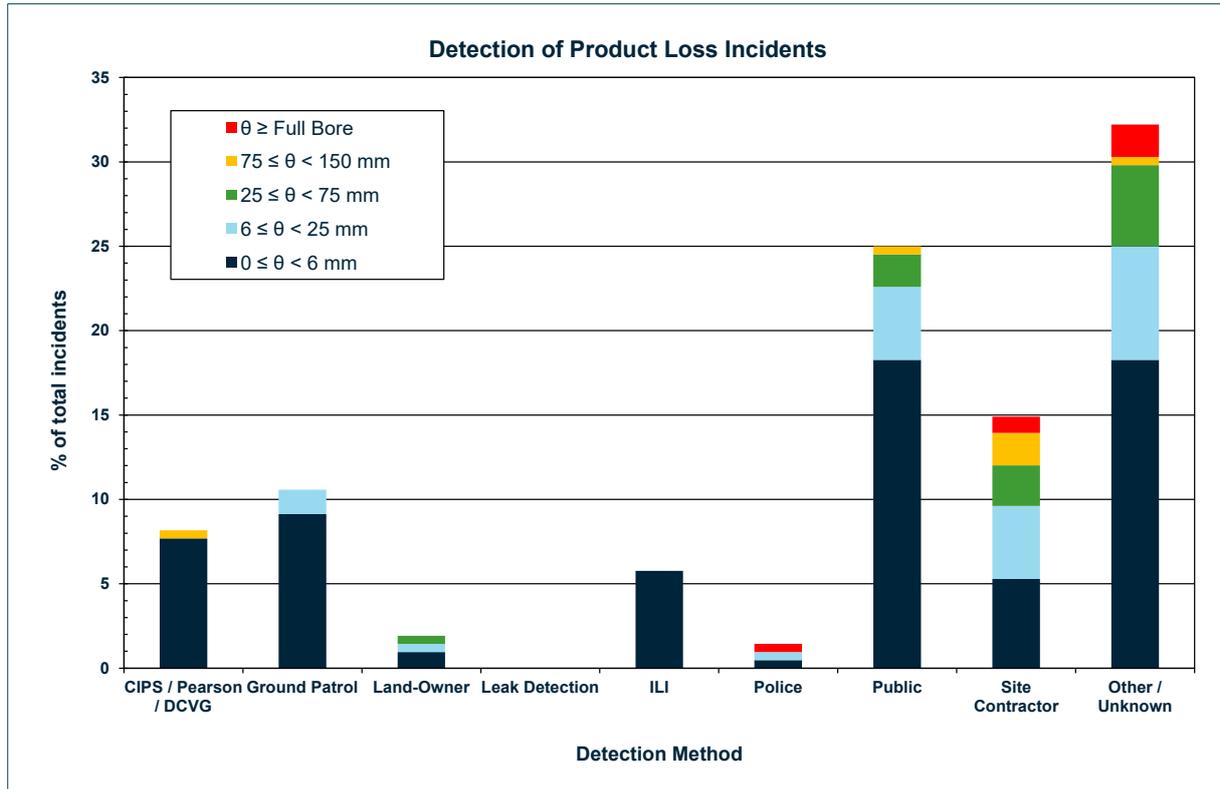


Figure 4.17: Detection of Product Loss Incidents by Equivalent Hole Diameter

Note 1: Not all pipelines can be inspected by In-Line Inspection (ILI) and leak detection systems are not applicable to all pipelines and pipeline networks.

5. FAULT DATA

A Fault is a feature relating to a specific event, incident or location that has been subject to field investigation, excavation and measurement and may consist of several individual part-wall defects, e.g. multiple dents and gouges from the teeth of an excavator.

Any features that are inferred by other measurements such as intelligent pig in-line inspections, monitoring the performance of cathodic protection systems, etc. and have not been verified in the field are not included in the UKOPA database. However, pipeline defects comprising of coating damage or grinding marks confirmed by field inspection are included.

The total number of Faults recorded for the period 1962 – 2023 was 4,064 compared to 3,937 for the period 1962 – 2022. The main causes of the Faults are shown in Figure 5.1.

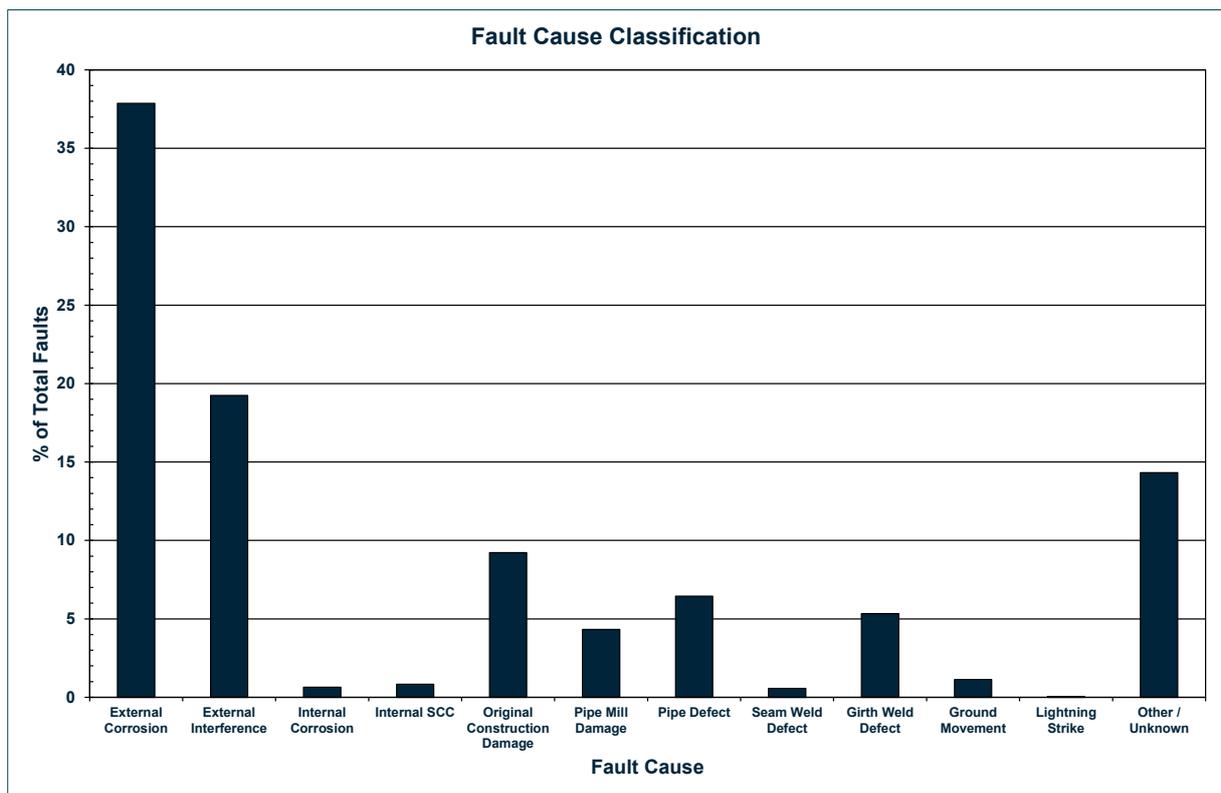


Figure 5.1: Fault Cause Classification

5.1 Part Wall Defect Data

One of the main benefits of collecting Fault data is to record of the size of part-wall defects which are measured and recorded in the database. Many faults have several defects and as a result the database contains 6,840 defects recorded in the period 1962 – 2023 compared to 6,629 in the period 1962 – 2022. The classification of defect data is shown in Figure 5.2.

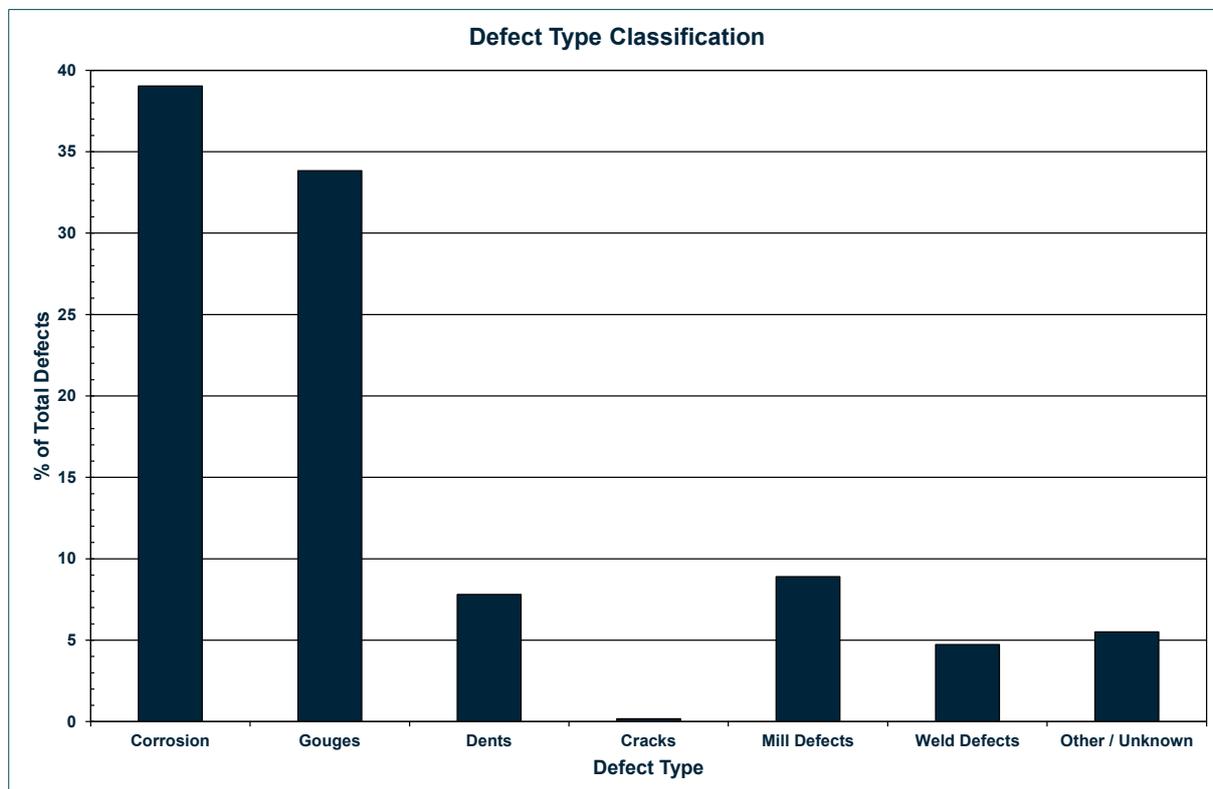


Figure 5.2: Defect Type Classification

5.2 Statistical Distributions of Defect Dimensions

Pipeline damage due to external interference occurs in the form of gouges, dents or dent-gouge combinations. This type of damage is random in nature, and as operational failure data are sparse, recognised engineering practice requires that a predictive model is used to calculate leak and rupture failure frequencies for specific pipelines. Predictive models such as those described in [2, 3, 4, 5, 6, 7], use standard pipeline industry gouge and dent-gouge fracture mechanics models to predict the pipeline probability of failure, which is also dependent upon the pipeline geometry, material properties and operating pressure.

The UKOPA database includes reports of external interference incidents, including the type of damage, the size of the damage and the number and location of the incidents. The external interference damage data, recorded from 1962 and up to and including 2016, has been analysed to determine the best fit distribution parameters for the following key parameters [6, 7]:

- 'Plain' Gouge Length;
- 'Plain' Gouge Depth;
- 'Gouge in Dent' Gouge Length;
- 'Gouge in Dent' Gouge Depth; and,
- Dent Force.

The distribution parameters for the 1962 – 2016 data are given in Table 5.1.

Fault Type	Fault Parameter	Distribution Type	Distribution Parameters	
			μ	σ
'Plain' Gouge	Length (mm)	Lognormal	4.351	1.360
	Depth (mm)	Lognormal	-0.645	1.161
'Gouge in Dent'	Length (mm)	Lognormal	4.059	0.996
	Depth (mm)	Weibull	1.15	1.51
Dent	Denting Force (kN)	Lognormal	μ	σ
			3.969	0.516

Table 5.1: Distribution Parameters for Damage Data (1962 – 2016)

These parameters allow pipeline failure probabilities to be derived for external interference events using recommended models [6, 7]. An estimate of the “hit rate” (i.e. the frequency of external interference incidents), which is also dependent on location class (rural/suburban) and depth of cover, is required to obtain pipeline failure frequencies. The hit rate in rural areas associated with the above damage distribution parameters is 1.099 per 1000 km yr.

The next update of the distribution parameters is scheduled to be undertaken following receipt of the 2026 data.

6. REFERENCES

- [1] G. D. Goodfellow and C. J. Lyons, "UKOPA Pipeline Fault Database. Product Loss Incidents and Faults Report (1962 - 2022)," UKOPA/RP/24/001, Edition 1, November 2024.
- [2] I. Corder, "The Application of Risk Techniques to the Design and Operation of Pipelines," in *Proceedings of International Conference on Pressure Systems: Operation and Risk Management*, Institution of Mechanical Engineers, London, UK, C502/016/95, pp 113-125, 1995.
- [3] C. Lyons, J. V. Haswell, P. Hopkins, R. Ellis and N. W. Jackson, "A Methodology for the Prediction of Pipeline Failure Frequency due to External Interference," IPC2008-64375, Proceedings of IPC2008, 7th International Pipeline Conference, Calgary, 2008.
- [4] A. Cosham, J. V. Haswell and N. Jackson, "Reduction Factors for the Probability of Failure of Mechanical Damage due to External Interference," IPC2008-64345, Proceedings of IPC2008, 7th International Pipeline Conference, Calgary, 2008.
- [5] P. Seevam, C. Lyons, P. Hopkins and M. Toft, "Modelling of Dents and Gouges and the Effect on the Failure Probability of Pipelines," IPC2008-64061, Proceedings of IPC2008, 7th International Pipeline Conference, Calgary, 2008.
- [6] G. Goodfellow, C. Lyons, S. Turner, F. Gray and S. Joyce, "An Update to the Recommended UKOPA External Interference Frequency Prediction Model & Pipeline Damage Distributions," IPC2018-78767, Proceedings of the 2018 12th International Pipeline Conference, IPC 2018, Calgary, 2018.
- [7] G. Goodfellow, "Recommendations for Predictive Modelling of External Interference Failure Frequency," Pipeline Integrity Engineers Report PIE/R/19/0406 Issue 1.0 for UKOPA FARWG, (UKOPA Members Only), May 2020.
- [8] SI 1996 No. 825, *The Pipelines Safety Regulations 1996, as amended*, HMSO.