



United Kingdom Onshore Pipeline Operators' Association

Good Practice Guide

Impact Protection Slabs

UKOPA/GP/006 Edition 2

July 2023

GUIDANCE ISSUED BY UKOPA:

The guidance in this document identifies what is considered by UKOPA to represent current UK pipeline industry good practice within the defined scope of the document. All requirements should be considered guidance and should not be considered obligatory against the judgement of the Pipeline Owner/Operator. Where new and better techniques are developed and proved, they should be adopted without waiting for modifications to the guidance in this document.

Comments, questions, and enquiries about this publication should be directed to:

UK Onshore Pipeline Operators' Association
Pipeline Maintenance Centre
Ripley Road
Ambergate
Derbyshire
DE56 2FZ

E-mail: enquiries@ukopa.co.uk

Website: www.UKOPA.co.uk

Disclaimer

This document is protected by copyright and may not be reproduced in whole or in part, by any means without the prior approval in writing of UKOPA. The information contained in this document is provided as guidance only and while every reasonable care has been taken to ensure the accuracy of its contents, UKOPA cannot accept any responsibility for any action taken, or not taken, on the basis of this information. UKOPA shall not be liable to any person for any loss or damage which may arise from the use of any of the information contained in any of its publications. The document must be read in its entirety and is subject to any assumptions and qualifications expressed therein. UKOPA documents may contain detailed technical data which is intended for analysis only by persons possessing requisite expertise in its subject matter.

Copyright ©2023, UKOPA. All rights reserved

Revision and change control history

Planned revision: 2028

Edition	Date	No. of pages	Summary of changes
1	January 2016	11	First Issue
2	July 2023	14	Reformatted, editorial review, incorporation of member comments, update of reference standards

CONTENTS

1.	Introduction	1
2.	Scope and Application	2
2.1	Scope	2
2.2	Application	2
3.	Standard Design	4
3.1	Geometry	4
3.2	Requirements for Standard Design	4
4.	Materials	6
4.1	Standard Materials	6
4.2	Alternative Materials	6
5.	Site Preparation	7
5.1	Pipeline Location	7
5.2	Coating Check	7
5.3	Excavation	7
5.4	Strength of Slab Subgrade	7
5.5	Replacement of Slab Subgrade	7
6.	Installation	8
6.1	Cast In-Situ Slabs	8
6.2	Precast Slabs	8
6.3	Pipeline Marker Tape	8
7.	Workmanship	9
8.	Drawings	10
8.1	Drawing 001 – Impact Protection Slab Design	11
8.2	Drawing 002 – Expansion & Contraction Joints	12
8.3	Drawing 003 – Joint in Pre-Cast Slab	13
	Appendix 1 Typical Encroachment Zone of a Range of Excavators	14

1. INTRODUCTION

This specification provides guidance on the design and construction of impact protection slabs for use above high pressure oil and gas transmission pipelines.

2. SCOPE AND APPLICATION

2.1 Scope

The standard design for an impact protection slab, as detailed in this specification, is primarily intended to act as a physical barrier to reduce the likelihood of pipeline damage from third party activities. These typically cover excavation on construction projects or drainage works.

The standard slab design applies to soil overburden loads for a maximum pipeline cover of 2m.

The design in this specification does not apply to:

- Traffic loads
- Construction loading
- Sustained 'abnormal' loading

For these situations, a case specific design is required based on the anticipated loads, pipeline installation geometry and ground conditions.

The principal design method involves a steel reinforced concrete slab; however other construction materials may be suitable subject to additional checks.

'Abnormal' loading implies situations such as excessive ground settlement, industrial loads, storage of agricultural product or plant etc.

2.2 Application

The guidance in this document is considered by UKOPA to represent current UK pipeline industry good practice within the defined scope of the document. All requirements should be considered to be guidance and should not be considered to be obligatory against the judgement of the Pipeline Owner/Operator. Where new and better techniques are developed and proved, they should be adopted without waiting for modifications to the guidance in this document.

The design guidance in this specification is principally based on the following codes and standards. Unless otherwise specified, the latest editions of the documents apply including all amendments.

Relevant codes

BS EN 1992-1-1:2004	Structural use of concrete
BS EN 206-1:2000	Concrete. Specification for the procedures to be used in producing and transporting concrete
BS EN 13164:2008	Thermal insulation products for buildings. Factory made products of extruded polystyrene foam (XPS).
BS EN 1992-2:2005	Design of concrete structures. Concrete bridges. Design and detailing rules
BS 5400-4:1990	Steel concrete and composite bridges
BS 8110-1:1997	Structural use of concrete. Code of practice for design and construction

Industry Standards

IGEM/TD/1	Steel pipelines for high pressure gas transmission
PD 8010-1	Pipeline systems. Steel pipelines on land. Code of practice
T/SP/SSW/22	Safe working in the vicinity of national grid high pressure gas pipelines and associated installations – requirements for third parties
Linewatch	Special requirements for safe working in close proximity to high pressure pipelines

3. STANDARD DESIGN

3.1 Geometry

The basic geometry and layout of the protection slab and relation to the pipeline is summarised in Figure 1.

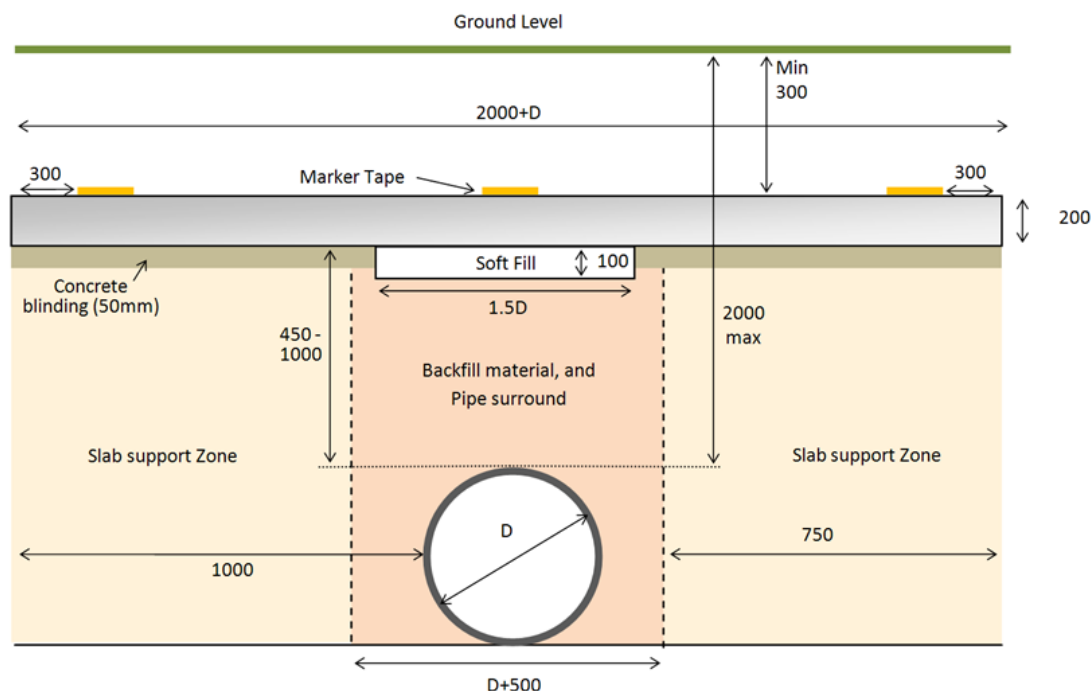


Figure 1 - Geometry of the slab (All measurements are in millimetres, not to scale)

A detailed design is set out in Drawing 001 in Section 8 of this specification.

The slab width is designed to provide a minimum lateral encroachment distance of 1.0m. This is considered adequate for standard excavation plant. See Appendix 1 for a diagram of possible excavator and pipeline interaction.

3.2 Requirements for Standard Design

For the standard slab design to be applicable the site must adhere to the following requirements.

- The slab installation is for un-trafficked areas.
- The maximum depth of cover on the pipeline is 2m.
- The slab should be a minimum of 300mm from the surface.
- The soil strength in the slab support zones must meet or exceed the BS 5930 classification of firm or exhibit a minimum California Bearing Ratio (CBR) of 4%.
- The width of soft-fill centred on the pipe crown is 1.5 times the diameter of the pipe, but is a minimum of 450 mm.

In addition the slab shall satisfy the following criteria:

- The slab depth in agricultural areas shall be a minimum depth of 0.5m below ground surface to avoid normal plant activity interference; and,
- The maximum distance from the pipe crown to the underside of the slab is 1m and the minimum distance is 450mm.

If they fail to qualify for any of the above conditions, then a site specific design must be carried out by a competent civil or structural engineer.

4. MATERIALS

4.1 Standard Materials

The following materials shall be used;

Concrete	C35
Reinforcement	Grade 460A, B785 fabric mesh The 10 mm diameter bar is orientated perpendicular to the pipeline axis
Softfill	LD grade expanded polystyrene board, suitable for the control of clay heave
Subgrade	Type 1 or 2 fill (Specification of Highway Works (SHW) series 800 definition) to be used when the existing load bearing subgrade is below the required standard.

4.2 Alternative Materials

Alternatives to the standard reinforced concrete slab used in this specification may be possible. These include:

- High-Density injected Polyethylene (HDPE); and,
- Steel plate.

These materials exhibit good resistance to punching shear such as from excavator buckets. The primary design issue is low flexural stiffness which could develop higher crown loads on the pipeline. Proposals to use an alternative material must be supported by appropriate assessments of the proposed alternative's ability to provide pipeline integrity.

5. SITE PREPARATION

5.1 Pipeline Location

Prior to commencing any works around an existing pipeline, the alignment of the pipeline shall be clearly marked out on the surface. The depth of the pipeline from the surface shall be measured at a minimum of 5 m spacing on small installations less than 30 m in length and 10 m spacing for larger installations. Electronic measurements of the pipeline depth shall be confirmed by excavation at one or more locations. Further guidance on procedures for establishing the pipeline location and exposing the pipeline can be found in the Linewatch document Special requirements for safe working in close proximity to high pressure pipelines.

5.2 Coating Check

The pipeline owner should consider a survey of coating condition prior to installation of the impact protection slab because ease of access will be reduced following installation. Repairs of any damage should be completed before the slab installation commences.

5.3 Excavation

Excavation for the slab installation shall only be carried out under supervision of the owning authority or delegated authority. On completion, the excavated area shall be marked out to define the area of expanded polystyrene centred on the pipe and the load bearing strips either side of the polystyrene.

5.4 Strength of Slab Subgrade

The strength of the subgrade in the slab support zones on either side of the pipeline must be sufficient to support the slab without bearing capacity failure or excessive settlement. Cohesive soil that is classified as soft to BS 5930 is not permitted. This shall be determined by an engineer competent in the field assessment of soil strength. Where there is uncertainty, the suitability of the material shall be demonstrated by in-situ testing to derive the CBR. A minimum of 3 tests shall be undertaken for small installations less than 30 m in length, and one additional measurement for every 10m length over 30m.

Where access for in-situ tests is difficult, laboratory values for CBR may be considered by using the density and moisture content of the in-situ soil. Correlations of CBR value from soil properties may be acceptable providing the source and validity of the method is substantiated.

5.5 Replacement of Slab Subgrade

Where the soil is deemed unsuitable or has been demonstrated to be unacceptable by a CBR value of less than 4%, the material shall be removed and replaced with an imported granular fill. This shall extend to the depth of the unsuitable material or to a maximum depth equal to the base of the pipe. Type 1 or 2 fill to SHW Series 800 is recommended. The imported fill shall be compacted to the requirements of SHW Series 600.

6. INSTALLATION

6.1 Cast In-Situ Slabs

6.1.1 [Concrete blinding](#)

A 50 mm layer of lean concrete blinding shall be laid onto the subgrade to ensure a good base for the placement of the slab. Refer to Drawing 001 in Section 8.1

6.1.2 [Reinforcement](#)

The concrete cover to the reinforcing mesh shall be 50mm from the base and edges. The orientation of the major reinforcement elements of the mesh shall be perpendicular to the axis of the pipe.

6.1.3 [Joints](#)

The optimum distance between the joints can be determined by the operator but shall be formed at maximum centres of 35 m. For each set of three joints, two will be contraction joints and one will be an expansion joint. Refer to Drawings 002 in Section 8.2 for detailed designs.

6.1.4 [Lifting](#)

To move the slab after installation, a minimum of four points of contact shall be used with a spacing of no more than 1.8m and a distance to the edge of no more than 0.9m.

6.2 Precast Slabs

6.2.1 [Lifting](#)

The lifting points for the slabs shall be formed from heavy duty tubular inserts placed a sufficient distance from the edge to prevent shear failure. This shall be a minimum of 200mm. A four point lift arrangement is required. The maximum slab segment length (in the direction of the pipeline axis) shall be 2.5m. The metal inserts shall be protected adequately from corrosion for the life of the slab.

6.2.2 [Placement](#)

The slab sections shall be clearly marked to indicate the top to avoid problems of incorrect placement.

6.2.3 [Joints](#)

Refer to Drawing 003 in Section 8.3 for detailed design.

6.3 Pipeline Marker Tape

Three continuous strips of pipeline marker tape shall be laid above the slab centreline and 300 mm from each slab edge along the full length of the slab to warn of the presence of the pipeline during any excavation activity.

7. WORKMANSHIP

In no circumstances shall any reinforcement be allowed to protrude from the slab or contact the pipeline. All other workmanship issues should be carried out in accordance with the relevant standards as described below.

BS EN 1992-1-1	Concrete production and transportation
BS EN 206-1:2000	Machine mixed and batched
BS EN 1992-1-1	Placing of concrete
BS EN 1992-1-1	Cold and hot weather concreting
BS EN 1992-1-1	Compaction of concrete
BS EN 1992-1-1	Curing of concrete
BS EN 1992-1-1	Formwork
BS EN 1992-1-1	Reinforcing fixing
BS EN 206-1:2000	Concrete Testing

8. DRAWINGS

IMPACT PROTECTION SLAB
SCALE 1:5

NOTES:

- GRADE C35 CONCRETE TO BE USED FOR SLAB
- REINFORCEMENT GRADE 460A, 8785 MESH LAD WITH 10mm BARS ACROSS THE TRENCH AND PERPENDICULAR TO THE PIPELINE AXIS.
- SOFT FILL - EXPANDED POLYSTYRENE BOARD, LOW DENSITY SUITABLE FOR CLAY HEAVE APPLICATIONS.
- SLAB SUPPORT ZONE IS EXISTING IN SITU MATERIAL OR IMPORTED COMPACTED FILL IF STRENGTH OF EXISTING MATERIAL IS INADEQUATE, MINIMUM OF FIRM SOIL OR COR > 4%.

Andrew Palmer & Associates
Bishop's Court, 29 Albyn Place, Aberdeen AB10 1TL
Tel: 01224 288 500 - www.gpsgroup.com

UKOPA SPECIFICATION - IMPACT PROTECTION SLAB


IMPACT PROTECTION SLAB DESIGN

20 MAY 16 01/005/15011-01-001 DESIGN REVIEW AS NOTED


12631 DRAWING 001

Drawings

8.2 Drawing 002 – Expansion & Contraction Joints

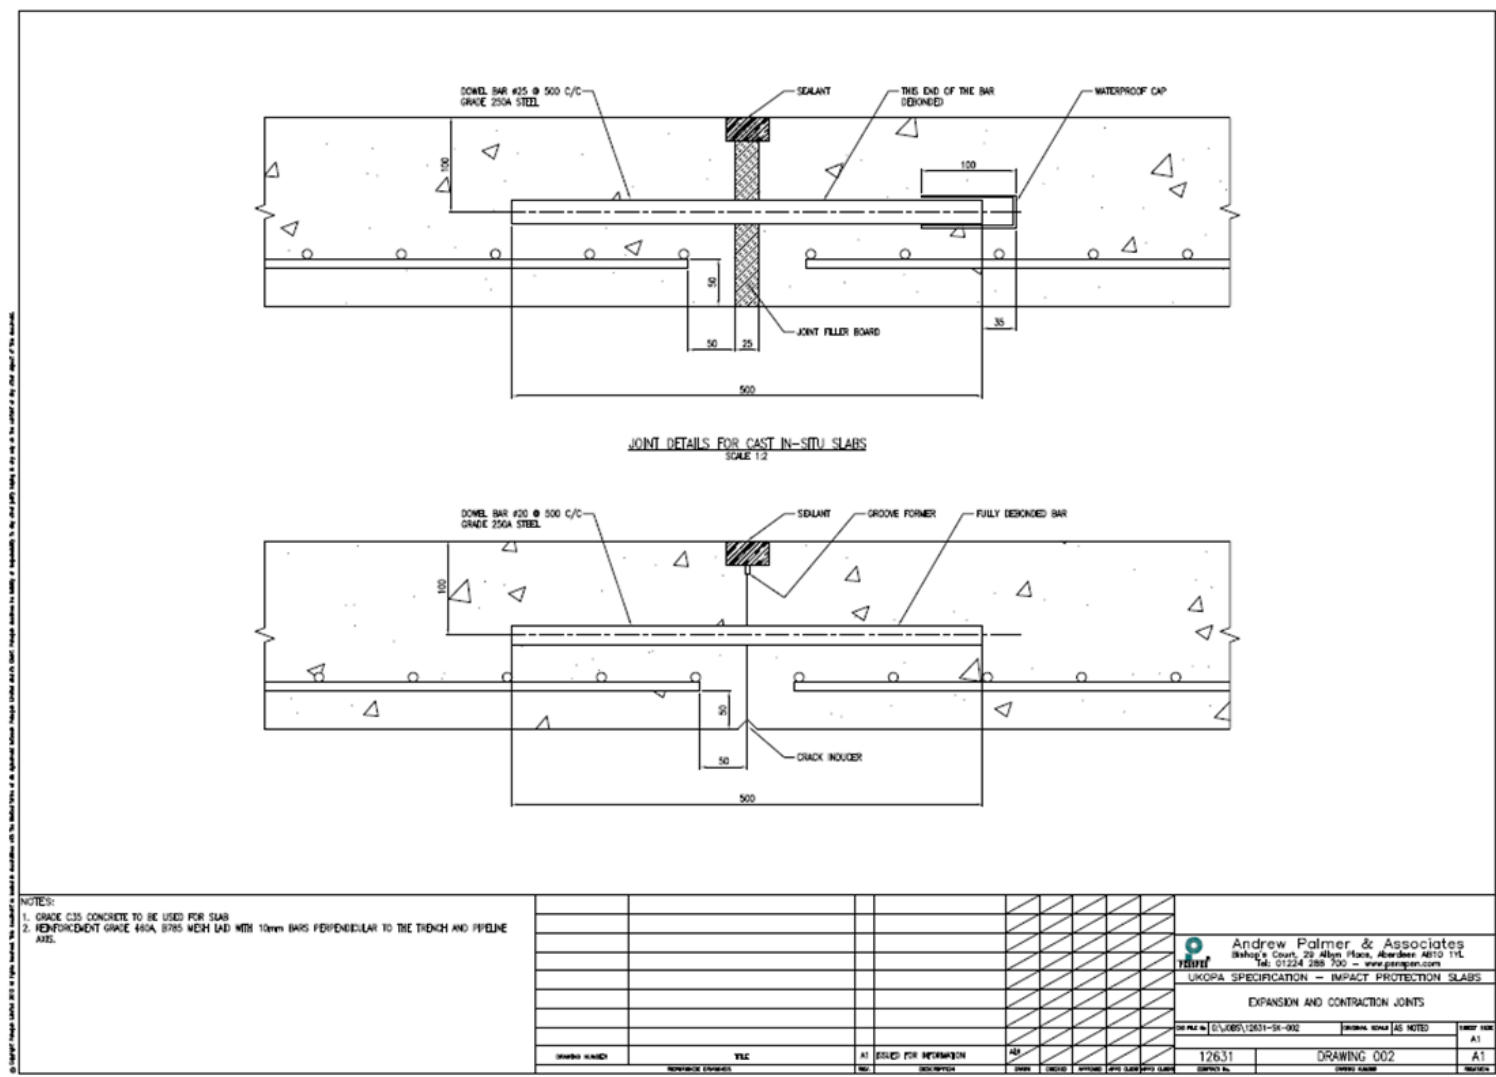

8.3 Drawing 003 – Joint in Pre-Cast Slab

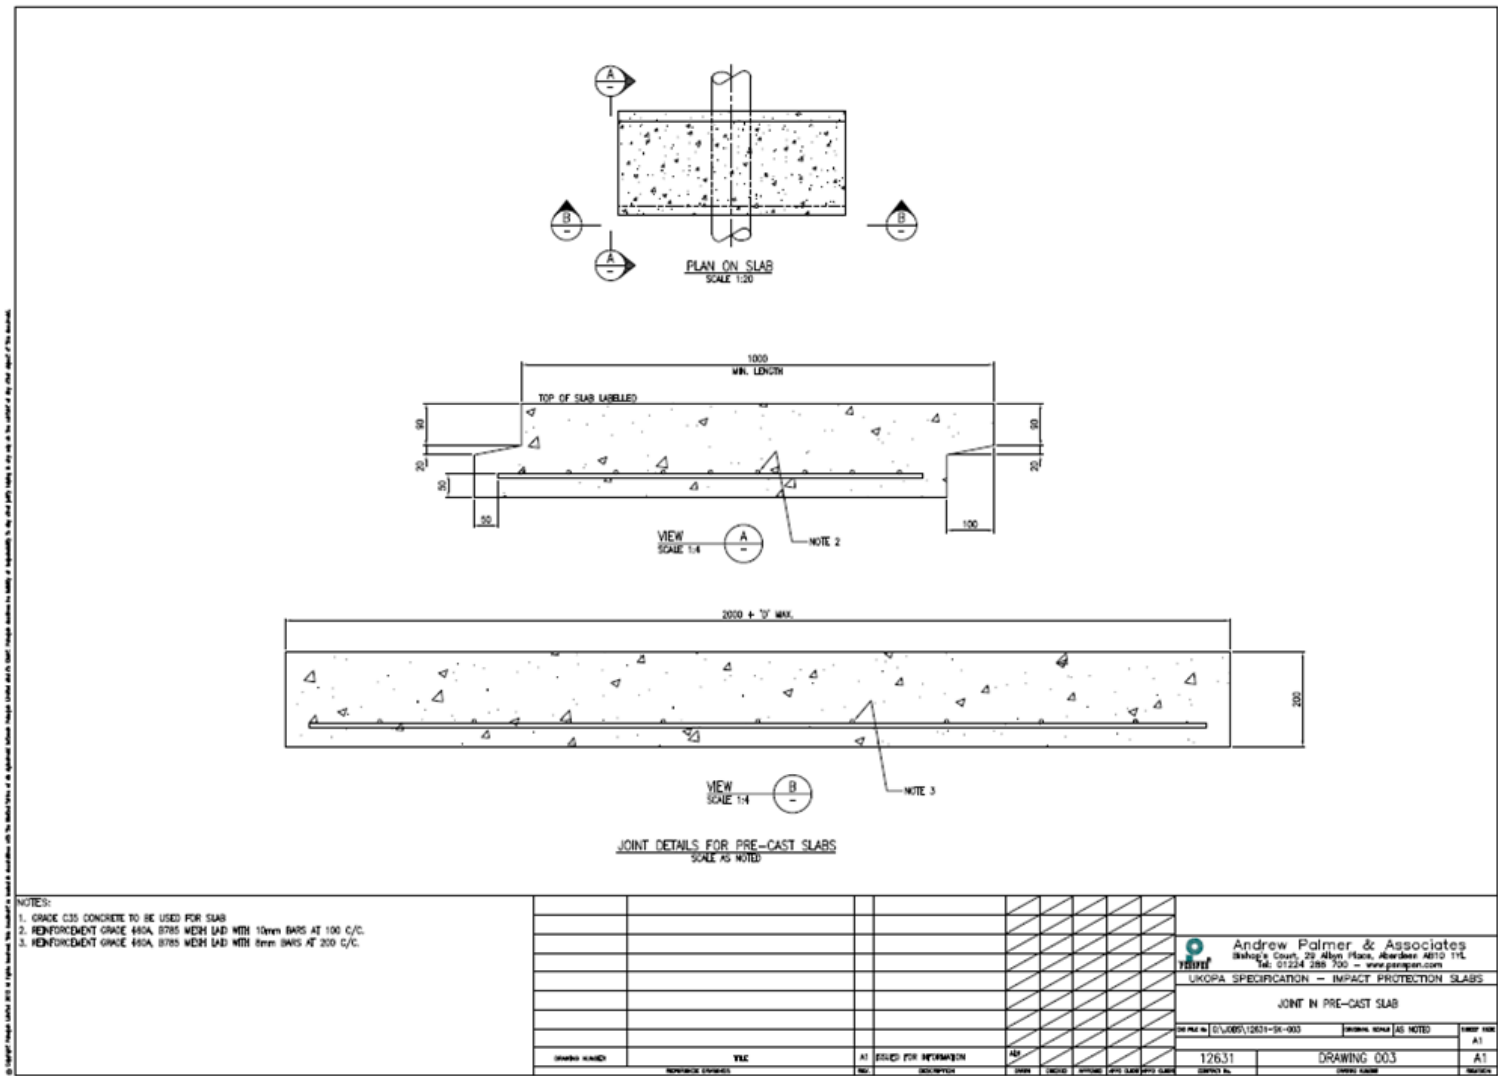

APPENDIX 1 TYPICAL ENCROACHMENT ZONE OF A RANGE OF EXCAVATORS

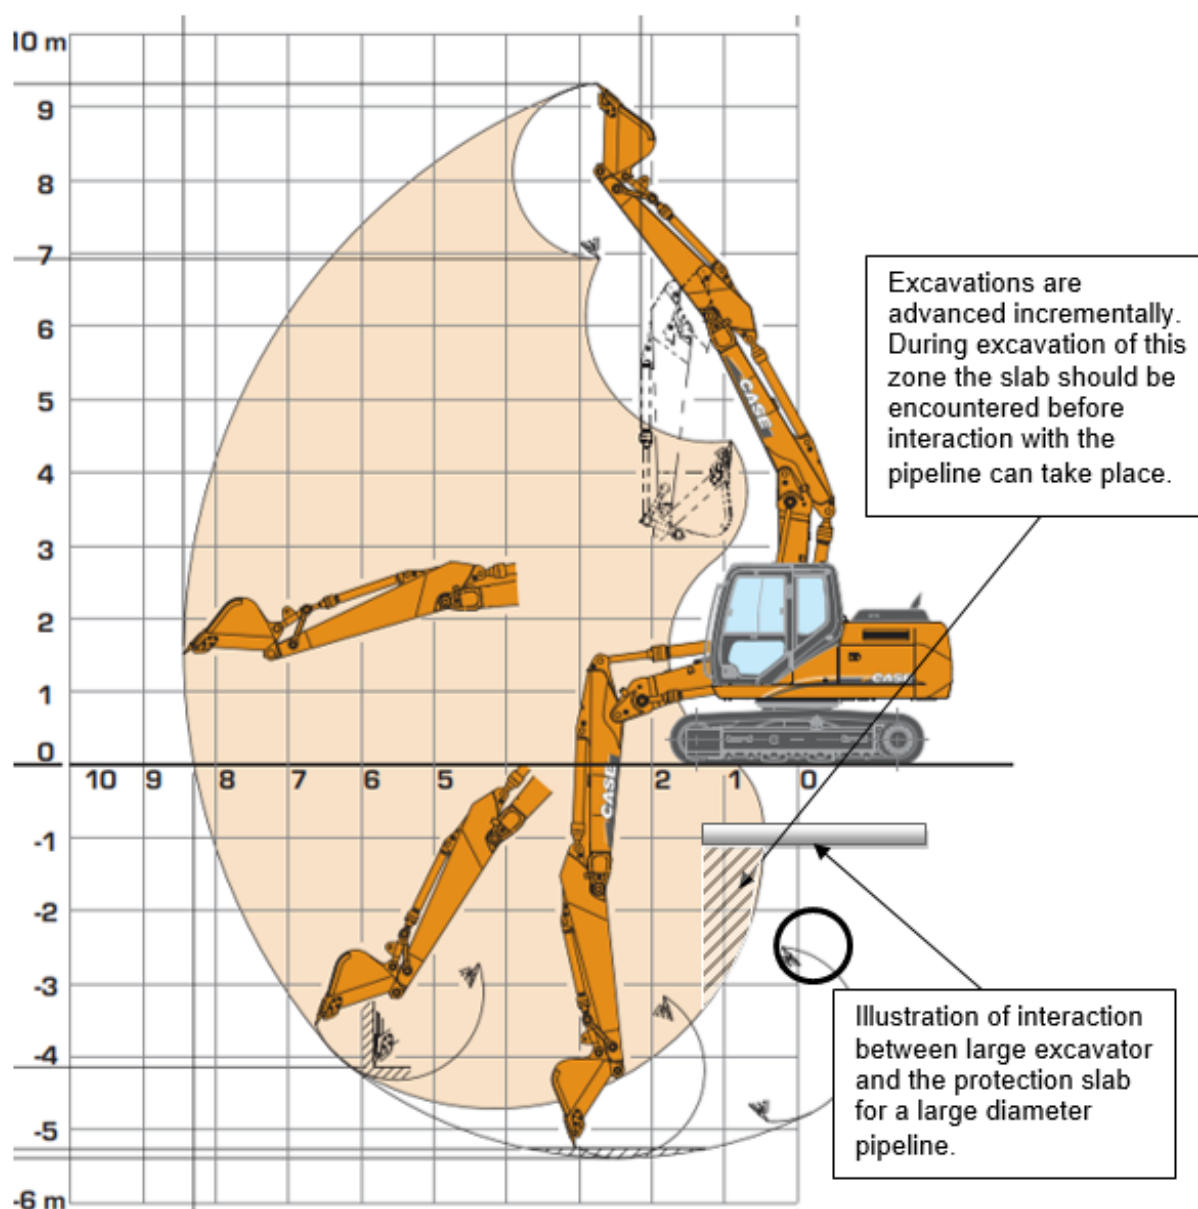


Figure 2 12T Case CX130B (Diagram by permission of Case Construction LTD)